

### **HET-2106 Series CPE Switch**



5 ports 10/100Mbps RJ-45 + 1 port 100Mbps fiber optics uplink Managed Ethernet CPE Switch







#### **Features**

#### Easy To Install And Use

With Auto-MDI/MDI-X and 10/100Mbps auto-senses support. If network device connected to the CPE Switch is never need crossover cables and adjusts running at 10Mbps or 100Mbps speed

- Support IGMP Snooping V1/V2
  IGMP snooping to quickly deploy IPTV service
- Support Q-in-Q VLAN

With Q-in-Q VLAN stacking, the service providers can transport the encapsulated traffic for different customers without security risk

DHCP Auto-Provision with Text based Config file

Fulfill the deployment requirement and reduce the OPEX of device maintenance for service providers or operators

SNMP Power down trap

Popular SNMP trap message to rapidly identify network fault due to power outage and reduce truck rolls to save OPEX for service providers

Built-in Cable Tray

Keep excessive fiber inside the box. Save extra cost of buying a separate cable tray as well as saving installation space

#### **Target Applications**

 SOHO & Residential CPE switch which requires simple network management for FTTX service deployment

#### **Description**

Connection Technology Systems (CTS) HET-2106 series CPE Switch are the Fast Ethernet 10/100Base-TX to 100Base-FX or 10/100Base-TX CPE Switch within an eye-catching pearl-white box, plus a built-in cable tray. Often, the fiber is intentionally left longer than it actually needs. With the built-in cable tray, it allows users to enclose the excessive fiber within the box, providing extra protection for the sensitive fiber.


The HET-2106 series CPE Switch traditional twisted-pair RJ-45 cable into various fiber media including multi-mode, single-mode, SC/ST connector, bi-directional WDM, or a SFP slot for pluggable fiber transceiver. The traditional transmission distance of 100m over RJ-45 copper can be extended from 2km to 100km over fiber.

HET-2106 series CPE Switch is fully compliant with IEEE 802.3 & 802.3u standards. You can connect another switch or NIC through HET-2106 series CPE switch 10/100Base-TX twisted-part RJ-45 port without crossover cables and monitor the status through comprehensive LED display.

HET-2106 series CPE Switch can be easily managed by CLI, telnet, SNMP, and DHCP auto-provision. With CTS unique Power Down Trap feature, HET-2106 is able to send out a SNMP trap message when encountering power outage.

# **E** CTS

#### **Application Diagram**

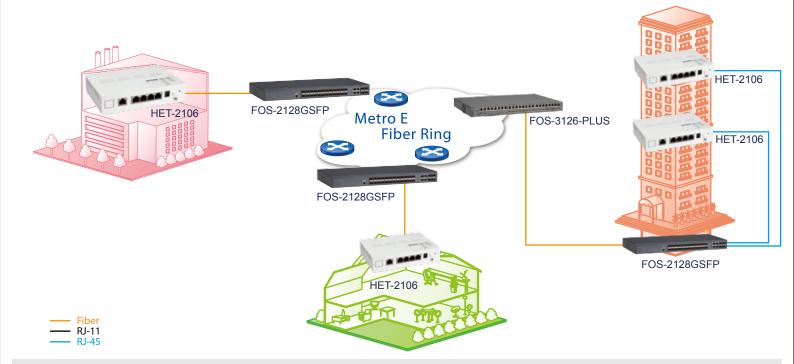

#### **Specification**

#### Interface

LAN Port 10/100Base-TX RJ45 x 5 **WAN Port** 100Base-FX x 1 or 10/100Base-TX

#### **Standards**

IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX/FX IEEE 802.3x Flow Control IEEE 802.1q Tag VLAN IEEE 802.1p Priority

#### **Product Specification**

Store and forward switching mechanism Auto-Cross over for MDI/MDI-X in TP port Auto-Negotiation in TP port Full/Half Duplex Mode Operation 2K MAC address table 80K bytes memory buffer

#### **Switch Feature**

IGMP snooping V1/V2 **Bandwdith Control** Port Based VLAN Tag VLAN Q-in-Q VLAN

VLANs: Support to 16 VLAN Groups Priority Queues: 4 Queues

#### **Management feature**

SNMP / CLI / Telnet interface Storm Control **TFTP Firmware update DHCP Clinet DHCP Auto-Provision** Text Based Config SFF-8472(digital diagnostic interface for Power down trap

#### LED

LAN, Power, WAN, Status

#### **Power Requirement**

Power adaptor AC input: 100VAC~240VAC Frequency range: 50~60Hz DC output: 12V, 1A Power consumption: 4.1W

#### **Environmental Condition**

Operation: 0° ~ 50°C Storage temperature: -20° ~ 60°C Humidity: 5% ~ 90% non-condensing

#### **Dimension & Weight**

Size: 160 x 110 x 36 mm (WxDxH) Shipping Weight: 1KG

#### **EMC/Safety**

FCC class A,

\* For further reports, please contact us for update

#### **Order Information**

| MODEL                       | FIBER PORT |      |           |                |       | TP PORT |       |
|-----------------------------|------------|------|-----------|----------------|-------|---------|-------|
|                             | Speed      | Туре | Connector | Distance       | Ports | Speed   | Ports |
| HET-2106FC                  | 100        | MM   | SC        | 2KM            | 1     | 10/100  | 5     |
| HET-2106FT                  | 100        | MM   | ST        | 2KM            | 1     | 10/100  | 5     |
| HET-2106FC(SM-30/50/80/100) | 100        | SM   | SC        | 30/50/80/100KM | 1     | 10/100  | 5     |
| HET-2106W2A(SM-20/40)       | 100        | WDM  | SC        | 20/40KM        | 1     | 10/100  | 5     |
| HET-2106W2B(SM-20/40)       | 100        | WDM  | SC        | 20/40KM        | 1     | 10/100  | 5     |
| HET-2106SFP                 | 100        | SFP  | -         | -              | 1     | 10/100  | 5     |
| HET-2106TP                  | -          | -    | -         | -              | -     | 10/100  | 6     |



## **Built-in Cable Tray Overview**







\* This is an overview of CTS HET series cable tray ONLY, and does not represent product details.