



FRM220-CWDM

CWDM Mux/DeMux

The FRM220-CWDM Mux/DeMux are modular design cards that support ITU-T G.694.2 wavelengths between 1271nm to 1611nm in 20nm increments. The FRM220-CWDM modules are protocol and rate transparent allowing different services such as 10G Ethernet, 10GFC, STM-64, OC-192 to be transported across the same fiber link. The passive FRM220-CWDM Mux/DeMux modules are available in 4,8 and 16-Channel (wavelength) models, supporting a variety of wavelength combinations and port configurations. The small and compact size of the CWDM modules yields one of the highest port densities in the industry. A 2U high 19-module FRM220 chassis populated with modules can yield up to 120 channels of capacity. FRM220-CWDM modules are passive devices that require no external power. They can also be installed in an FRM220 powered chassis with a NMC management module¹ and can be managed using SmartView EMS device management software, third-party SNMP software, Telnet or a serial console port. The modules can be installed in any FRM220 chassis equipped with other FRM220 media converters and transponders to provide a multi-service platform capable of delivering Ethernet, TDM, Voice and other services across a CWDM fiber common link.

Features

- Full native mode performance
- Passive model requires no power
- Protocol transparent, no limitation
- Utilizes industry standard ITU CWDM wavelength
- Standard LC connectors

- Passive device that can be installed in a powered chassis for managed applications
- Integration with Transponder in FRM220 chassis for CWDM application


Specifications

Channel	4, 8 or 16 channels
Standards	ITU-T G.694.2
Wavelength	1271 ~ 1611nm
Insertion Loss	4ch < 1.8dB, 8ch < 2.8dB, 16ch < 3.6dB
Return Loss	>45dB
Option	Upgrade port
	Wide 1310 ± 50 nm
Line Link	Single fiber or two fiber
Connector	LC / UPC

Dimension	4ch : 155x 23 x88 mm (D x W x H)
	8/16ch : 155x 42 x88 mm (D x W x H)
Weight	4ch: 200g
	8/16ch: 380g
Temperature	0 ~ 50°C (Operating)
	-40 ~ 70°C (Storage)
Humidity	0 ~95% (non-condensing)
Certification	CE, FCC

Ordering Information

Model Name	Description
FRM220-CWab-cde-xxxx	ab → DX: DeMux, MX: Mux, MD: Mux/DeMux
	c → 4:4ch, 8:8ch, H:16ch
	$d \rightarrow 0: no, 1: Monitor port, 2: 1x Upgrade Port$
	e (only for MD Model) → A: Single Fiber A Type, B: Single Fiber B Type, Blank: Dual Fiber
	xxxx → Wavelength optional (1271~1611)

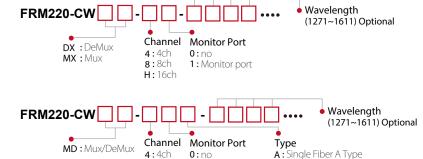

1: Monitor port

B: Single Fiber B Type

Blank : Dual Fiber

8:8ch



