


Gigabit PoE Injector



INJ-IG01-PH

Gigabit Ethernet PoE+ Injector IEEE802.3at/af, 15.4/30/36/60W (Compact)

INJ-IG01-PH is an industrial grade, single port, gigabit Ethernet PoE (Power over Ethernet) injector with power boost technology. PoE describes a system to pass electrical power safely, along with data, on Ethernet cabling. The original IEEE 802.3af-2003 PoE standard provides up to 15.4 W of DC power to each device. The updated IEEE 802.3at-2009 PoE standard also known as PoE+ or PoE plus, provides up to 30W of power. Additionally, INJ-IG01-PH can provide up to 36/60W through the non-standard use of all 4 pairs of category 5 cable. Housed in a rugged DIN rail or wall mountable enclosure, this product is designed for harsh environments, such as industrial networking, security, intelligent transportation systems (ITS) and is also suitable for many military and utility market applications where environmental conditions exceed commercial product specifications. Standard operating temperature range models (-10 to 60°C) and wide operating temperature range models (-40 to 75°C) fulfill the special needs of industrial automation applications.

Feature

- Provides 1 port IEEE802.3at/af PoE Injector
- Power output 15.4W, 30W, 36W, 60W select by DIP SW
- PoE Mode A/B Select by DIP SW
- 4 Pairs PD handshake mode select by DIP SW (Such as AXIS® IP cam)
- Wide operating temperature -40 ~ 75°C (INJ-IG01-PHE)
- IP30 rugged metal housing and fanless

Specifications


IEEE Standard	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet IEEE 802.3at, IEEE802.3af
PoE Standard	IEEE802.3at, IEEE802.3af
PoE RJ-45 Pin Assignment	RJ-45 support IEEE 802.3at/af Middle-Span Alternative B mode or End-Span Alternative A mode, set by DIP SW End-Span, Alternative A mode Positive (V+): RJ-45 pin 1, 2. Negative (V-): RJ-45 pin 3, 6. Data (1, 2, 3, 6, 4, 5, 7, 8) Middle-Span, Alternative B mode Positive (V+): RJ-45 pin 4,5 Negative (V-): RJ-45 pin 7,8 Data (1, 2, 3, 6, 4, 5, 7, 8)
Network Connector	1 RJ-45 for 10/100/1000Base-T Data, and 1 RJ-45 for 10/100/1000Base-T Data with PoE Output power
Network Cable	UTP/STP above Cat. 5e cable EIA/TIA-568 100-ohm (100m)
LED	Per unit: Power (Green) Alt A/PoE, Alt B/PoE (Green) ON when a PD device is connected to the GbE+PoE RJ-45 connector and the injector is feeding power in Alt A or B mode. Blinking One of the injector faults (overload, short circuit or over-temperature) occurs.
DIP SW	SW1 ON: Alternative B mode PoE Power Pin 4, 5, 7, 8 (When DIP SW 3 Off) OFF: Alternative A mode PoE Power Pin 1, 2, 3, 6 (When DIP SW 3 Off) SW2 ON: Hi Power 36W 36W PoE output OFF: Standard PoE 802.3af (15.4W), 802.3at (30W) SW3 ON: 4 Pair PoE Pin Ultra-High Power 60W PoE Output OFF: 2 Pair PoE Pin depend on DIP SW 1,2 SW4 60W PD handshake mode OFF: General PD at ether 2 or 4 pairs mode ON: Compatible with some particular PD devices at high power mode (4 Pair mode), such as AXIS® Q60
Reserve Polarity Protection	Present
Overload Current Protection	Present
Power Supply	(44~57VDC) Input power (Removable Terminal Block)
PoE Power Output	Maximum Ultra High Power 60W, IEEE802.3at 30W, IEEE802.3af High power 36W, IEEE802.3af 15.4W

Power Consumption	In 30W mode (2 Pairs)	In 60W mode (4 Pairs)
	Input Power Consumption (Input 48VDC) PoE Output Power	31.1W 30W


Removable Terminal Block	Provides 2 Pin for power input connectorn
Operating Temperature	-10 ~ 60°C (INJ-IG01-PH) -40 ~ 75°C (INJ-IG01-PHE)
Operating Humidity	5% to 95% (Non-condensing)
Storage Temperature	-40 ~ 85°C
Housing	Rugged Metal, IP30 Protection and fanless
Dimensions	70 x 30 x 103 mm (D x W x H)
Weight	215g
Installation Mounting	DIN Rail mounting, and Wall Mounting (Optional)
MTBF	409,994Hours (MIL-HDBK-217)
Warranty	5 years
Certification	
EMC	CE
EMI	FCC Part 15 Subpart B Class A, CE EN55022 Class A
Railway Traffic Immunity for Heavy Industrial environment	EN50121-4 EN 61000-6-2
Emission for Heavy industrial environment	EN 61000-6-4
EMS	EN61000-4-2 (ESD) Level 3, Criteria B EN61000-4-3 (RS) Level 3, Criteria A EN61000-4-4 (EFT) Level 3, Criteria A EN 61000-4-5 (Surge) Level 3, Criteria B EN 61000-4-6 (CS) Level 3, Criteria A EN61000-4-8 (PFMF) Field strength 300A/m Criteria A
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Vibration	IEC 60068-2-6

Application

► Figure : INJ-IG01-PH Gigabit Ethernet PoE Injector

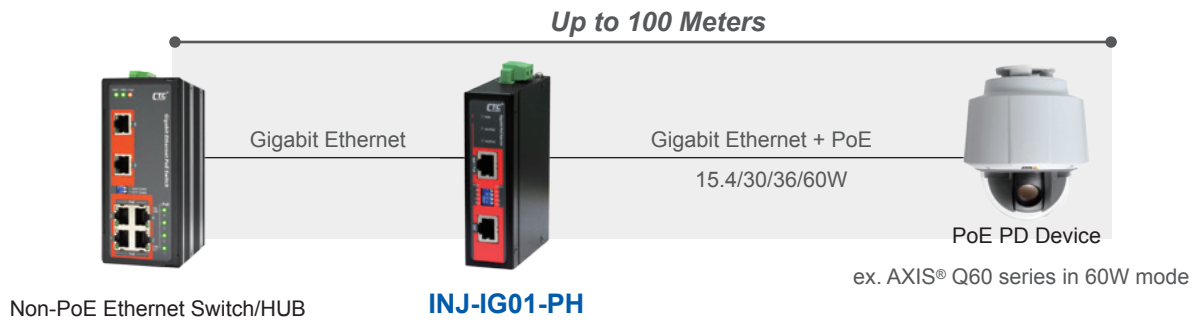


Dimensions

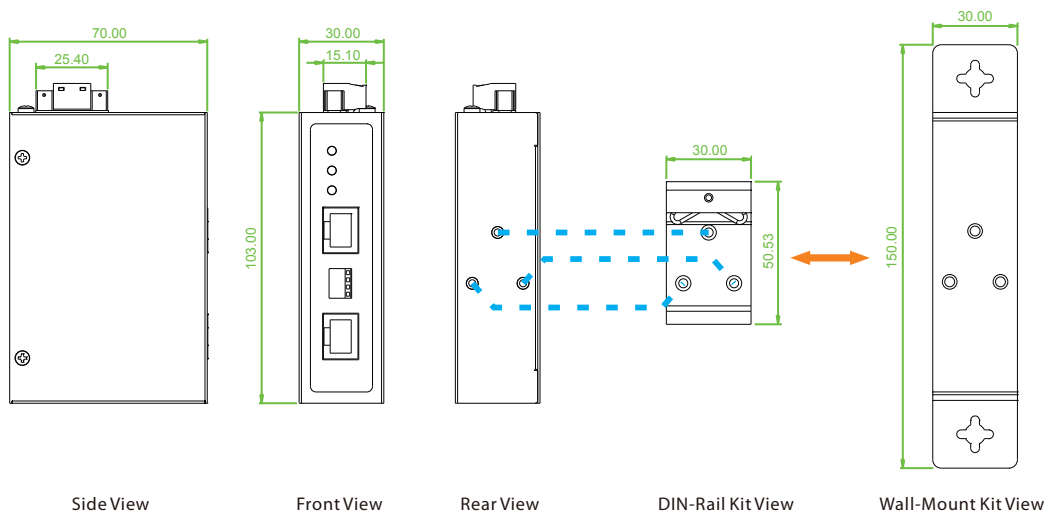

Ordering Information

Model Name	Ethernet		PoE Port		Certification				Operating Temperature
	10/100/1000 Base-T	IEEE802.3at (PSE)	Power Budget	Railway EN50121-4	EN61000-6-2 EN61000-6-4	CE	FCC		
INJ-IG01	1	1	15/30/36/60	V	V	V	V	-10~60°C	
INJ-IG01-E	1	1	15/30/36/60	V	V	V	V	-40~75°C	

Model Naming Rule

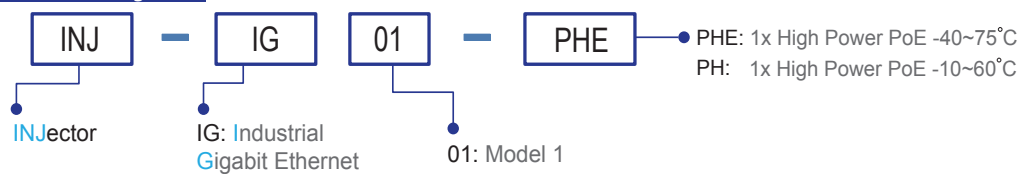

Optional Accessories

Industrial Power Supply

DR-120-48	Industrial Power, Input 88 ~ 132VAC / 176 ~ 264VAC, Output 48VDC, 120W, -10 ~ +60°C
IND-WMK03	Wall Mount kit for Industrial product (Compact, 150x 30mm)

Package List

- INJ-IG01-PH device
- Quickly installation guide
- Din Rail bracket with screws
- Terminal block