

CTC Union Technologies 8 Port Mini IP DSLAM

User Manual



Version 1.00

Tables of Contents

CHAPTER 1	INTRODUCTION.....	0
1.1	FEATURES.....	1
1.2	SPECIFICATION	2
CHAPTER 2	HARDWARE INSTALLATION	8
2.1	FRONT PANEL.....	8
2.1.1	Connectors	8
2.1.2	LED Indicators	9
2.1.3	Reset Button.....	9
CHAPTER 3	WEB CONFIGURATION	10
3.1	ADMINISTRATION.....	14
3.1.1	IP Address.....	15
3.1.2	Switch Setting.....	16
3.1.3	Console Port Information	19
3.1.4	Port Configuration.....	19
3.1.5	SNMP Configuration.....	23
3.1.6	Syslog Setting.....	29
3.1.7	Alarm Configuration.....	29
3.1.8	Temperatures & Fan Setting.....	30
3.1.9	Firmware Update	30
3.1.10	Configuration Backup.....	31
3.1.11	SNTP Setting.....	32
3.2	L2 FEATURES	33
3.2.1	VLAN Configuration	33
3.2.1.1	Static VLAN.....	34
3.2.1.2	GVRP VLAN.....	38
3.2.1.3	QinQ VLAN	40
3.2.2	Trunking	42
3.2.3	Forwarding & Filtering	45
3.2.4	IGMP Snooping	48
3.2.5	Spanning Tree.....	49
3.2.5.1	System Configuration	50
3.2.5.2	PerPort Configuration.....	51
3.2.5.3	Instance	52
3.2.5.4	Interface	52
3.2.6	DHCP Relay & Opt.82	53

3.2.6.1	DHCP Option 82	54
3.2.6.2	DHCP Relay.....	54
3.2.6.3	DHCP Option 82 Router Port	54
3.2.6.4	DHCP Opt. 82 Port Table	55
3.3	ACL	56
3.3.1	IPv4.....	57
3.3.2	Non-IPv4.....	58
3.3.3	Binding	58
3.4	SECURITY.....	60
3.4.1	Security Manager	60
3.4.2	MAC Limit	61
3.4.3	802.1x Configuration	62
3.5	QoS.....	65
3.5.1	QoS Configuration	65
3.5.2	ToS/DSCP	67
3.6	MONITORING.....	68
3.6.1	Port Status	68
3.6.2	Port Statistics.....	69
3.7	VDSL	70
3.7.1	Configuration.....	70
3.7.2	Profile Table.....	72
3.8	RESET SYSTEM.....	73
3.9	REBOOT	73
CHAPTER 4	CONFIGURATION VIA CONSOLE	74
4.1	LOGIN INTO THE CONSOLE.....	75
4.2	GENERAL INFORMATION OF COMMANDS	76
4.3	CONFIGURATION	77
4.4	COMMAND DESCRIPTIONS	79
4.4.1	System Commands	79
4.4.2	Switch Static Configuration	80
4.4.3	Trunk Commands.....	82
4.4.4	LACP Commands	83
4.4.5	VLAN Mode & Commands.....	84
4.4.6	GVRP Commands.....	86
4.4.7	QinQ Commands	88
4.4.8	Misc Configuration	89
4.4.9	Administration	90
4.4.10	Port Mirroring	91
4.4.11	QoS	92

4.4.12	<i>Commands for MAC</i>	93
4.4.13	<i>MAC Limits</i>	94
4.4.14	<i>Protocol Related Commands</i>	95
4.4.15	<i>SNMP</i>	101
4.4.16	<i>IGMP</i>	105
4.4.17	<i>802.1x</i>	106
4.4.18	<i>DHCP Relay & Option 82</i>	108
4.4.19	<i>Syslog</i>	109
4.4.20	<i>SSH</i>	109
4.4.21	<i>Reboot switch</i>	109
4.4.22	<i>TFTP Function</i>	110
4.4.23	<i>Access Control List</i>	111
4.4.24	<i>SIP/SMAC Binding</i>	114

Chapter 1 Introduction

8 Port Mini IP DSLAM presents the ideal and efficient solution for Telecom, ISP (Internet Service Provider), or SI (System Integration) with 8-port VDSL2 and 2-port gigabit Ethernet combo interfaces (TP and SFP) in the 1U height design. The Mini IP DSLAM offers the benefits of high speed connectivity with an efficient management system, robust layer 2 features with advanced security system, and reliable hardware design with monitoring system.

Package Contents:

- 8 Port Mini IP DSLAM x1
- User Manual CD x1
- Power Cord x1
- Rubber Feet x4
- Console Cable (DB9-RJ45) x1
- 19" Rack Mount Brackets and Screws x1

1.1 Features

- 1U Compact Design with 8 VDSL2 Ports and built-in POTS/ISDN Splitter.
- Supports VDSL2 Profiles 8a/8b/8c/8d/12a/12b/17a/30a.
- Supports Powerful Traffic Classification Tools, such as QoS, ToS and DSCP.
- Supports L2/L3 Content Filtering.
- Supports Port-Based VLAN, Protocol-Based VLAN and VLAN Mapping.
- Supports L2 Bridge Functions (IEEE 802.1d) and Multicast.
- DHCP Server/Relay/Client
- DNS Proxy
- Flexible Deployment and Maintenance.
- Web-based management with a user friendly interface.
- Configuration backup and restoration.

1.2 Specification

Hardware Interfaces:

- RJ-11 x 8 VDSL2 Ports
- RJ-11 x 8 POTS/ISDN Ports
- 2 x Gigabit Ethernet Combo ports (100/1000 Based-T and SFP)
- 1 x RJ-45 Console Port
- 1 x RJ-45 Alarm Port for 4 Alarm Inputs

LED Indicators:

- System: PWR
- Gigabit Port: LINK/ACT, SPEED 1000/100
- Alarm: RUN/ALARM
- VDSL: VDSL Link/Sync

Standards Support:

- VDSL2 ITU-T G.993.2
- VDSL2 Profiles: 8a, 8b, 8c, 8d, 12a, 12b, 17a and 30a
- 802.1d L2 Bridging
- DHCP Server/Client/Relay
- IEEE 802.1q VLAN (Port-based VLAN and Protocol-Based VLAN)
- VLAN Stacking (Q-in-Q)
- IEEE 802.1d Spanning Tree Protocol (STP)
- IEEE 802.3ad Link Aggregation

Protocol Support:

- IGMP Snooping/Proxy v1, v2 and v3
- Multicast Forwarding with IGMP Snooping v1 and v2 (RFC 1112 and RFC 2236)
- Multicast MAC address mapping
- Up to 512 Multicast Channels
- Profile-based Multicast Access

Control

(up to 24 profiles)

- Fast and Normal Leave Modes

Security:

- L2 Frame Filtering by MAC Addresses
- L3 Frame Filtering by IP Addresses, protocol ID, and TCP/UDP
- DHCP and ARP Broadcasting Frames Filtering
- Support Secured Forwarding

Management:

- Local Management: RS-232 and Telnet CLI, Web/SNMP management.
- Remote in-band Management: Web/SNMP/Telnet
- Support SNMP v1/v2/v3

Operating Environment

- Operating Temperature: -10°C to 50°C
- Storage Temperature: -40°C to 70°C
- Humidity: 10% - 95% (non-condensing)

Physical/Electrical

- Dimensions: 404 x 174 x 44.5 mm, 1U height
- Power: 100-240 V ac, 50-60 Hz
- Power Consumption: 30Watts maximum

Regulatory Compliance

- CE
- VCCI
- EN60950

* CTC Union Technologies reserve the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. All rights reserved.

Chapter 2 Hardware Installation

This chapter shows the front panel and how to install the hardware.

2.1 Front Panel

8 Port Mini IP DSLAM includes all connectors and LED indicators on its front panel so only a few installations are required in order to build the network solution.




2.1.1 Connectors



- **POTS**
8 Port Mini IP DSLAM includes 8 build-in splitters, POTS, with a RJ-11 cable for telephone services.
- **LINE**
LINE is for connecting 8 VDSL2 ports with a RJ-11 cable.
- **ALARM**
For alarm inputs and outputs.
- **CONSOLE**
Users are able to access 8 Port Mini IP DSLAM locally with CONSOLE port. Via CONSOLE, users are able to configure 8 Port Mini IP DSLAM with menu-driven interface with any terminal emulation program, such as, Hyperterminal and Teraterm. (115200, 8, None, 1, None)
- **GE1 & GE2**
For connecting Gigabit Ethernet, 8 Port Mini IP DSLAM provides Gigabit Ethernet combo interfaces, TP and SPF.
TP: 10/100/1000 BaseT copper (RJ-45 connector).
SFP: 1000 Base-SX/LX mini-GBIC slot.
- **POWER**
The connector is for 100V ~ 240V AC power inputs (50Hz~60Hz, 1.5A).

2.1.2 LED Indicators



			
	Blinking	On	Off
VDSL LINK (1 ~ 8)	VDSL2 link is active (transmitting data or training)	VDSL2 link is ready	VDSL2 link is down
RUN/ALARM	System Boot-up	Green: Alarm is detected Red: Alarm	
PWR		Power On	Power Off
GE1/GE2 LINK/ACT	Transmitting Data	1000Mbps	Link Down
SPEED	Transmitting Data	10/100Mbps	Link Down

2.1.3 Reset Button



The reset button allows users to reboot the 8 Port Mini IP DSLAM or load the default settings.

Press the reset button for	Action
1 ~ 5 seconds	Reboot the IP DSLAM
Over 5 seconds	Load the default settings

Chapter 3 Web Configuration


The Mini IP DSLAM allows users to manage and change its configurations with web browsers. Users are able to login the web management system with any standard web browser, such as, Internet Explorer, Firefox, etc.

Default IP Address	192.168.0.100
Default User Name	admin
Default Password	admin

TABLE 1 DEFAULT LOGIN INFORMATION

Note: Please make sure the IP address is correct once the IP of the management web site is changed.

Once users are able to login the web management page successfully, the login message box will pop up as the following image.

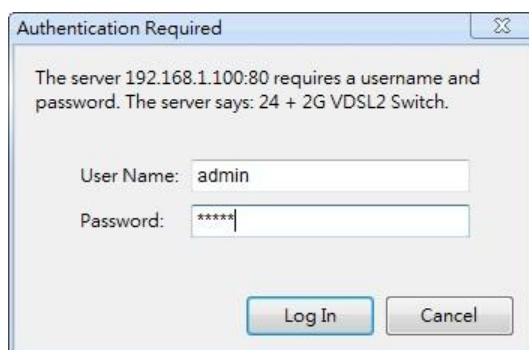

Please key in the correct login information and the main page of the management will be showed as the following image.



HOME page of the management system includes three major sections.

1. Title section



This section indicates the model name of the device.

2. Menu section

The screenshot shows the web interface of the Mini IP DSLAM. On the left, a navigation menu is highlighted with a red box. The menu items are: Home, Administration (with a dropdown arrow), IP Address, Switch Setting, Console Port Info, Port Configuration (with a dropdown arrow), SNMP Configuration, Syslog Setting, Alarm Configuration, Temperatures & Fan Setting, Firmware Update, Configuration Backup, SNTP Setting, L2 Features (with a dropdown arrow), ACL (with a dropdown arrow), Security (with a dropdown arrow), QoS (with a dropdown arrow), Monitoring (with a dropdown arrow), VDSL2 (with a dropdown arrow), Reset System, and Reboot. The main content area on the right shows the 'Home' page with a status overview. At the top of this area is a photograph of the device's front panel, which includes VDSL LINK ports (2, 4, 6, 8), a CONSOLE port, and two GE (Gigabit Ethernet) ports (GE1 and GE2). Below the photograph, the status information is displayed as follows:

Operating Mode	Bridge
DHCP Mode	Off
VDSL2 Profile	
VDSL2 Data Rate	0kbps(Up)/0kbps(Down) G1 100 Mbps/G2 ---
LAN Port	G1 Up/G1 Down/G2 Down/G2 Down
Status	G1 Copper/ G1 Fibber/G2 Copper/G2 Fibber

“Menu” section is located on the left hand side of the page and users are allowed to change the configuration and review the status of the device by interacting this section.

3. Information section

The screenshot shows the 'Information' section of the Mini IP DSLAM web interface. At the top, there is a 'Home' link. Below it is a photograph of the device's front panel, showing the VDSL LINK ports, CONSOLE port, and GE1 and GE2 ports. Below the photograph, the status information is displayed in a table, which is highlighted with a red box:

Operating Mode	Bridge
DHCP Mode	Off
VDSL2 Profile	
VDSL2 Data Rate	0kbps(Up)/0kbps(Down) G1 100 Mbps/G2 ---
LAN Port	G1 Up/G1 Down/G2 Down/G2 Down
Status	G1 Copper/ G1 Fibber/G2 Copper/G2 Fibber

“Information” section presents the real-time LED status and the current status of the Mini IP DSLAM.

Note: users are able to go back HOME page anytime by clicking on “Home” on the menu section.



The following sections will introduce users the features of the Mini IP DSLAM.

- Administration (3.1)
- L2 Features (3.2)
- ACL (3.3)
- Security (3.4)
- QoS (3.5)
- Monitoring (3.6)
- VDSL (3.7)
- Reset System 3.8)
- Reboot (3.9)


3.1 Administration



“Administration” section is for users to manage the MINI IP DSLAM, including the IP address, switch settings, etc. It includes the following detail functions.

- IP Address
- Switch Setting
- Console Port Info
- Port Configuration
- SNMP Configuration
- Syslog Setting
- Alarm Configuration
- Temperatures & Fan Status
- Firmware Update
- Configuration Backup
- SNTP Setting

3.1.1 IP Address

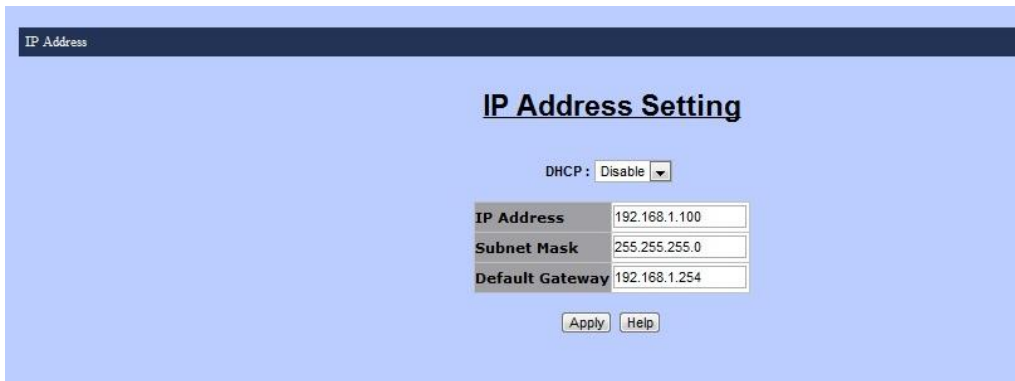

The screenshot shows a web interface for "IP Address Setting". At the top left, there is a dark blue header with the text "IP Address". The main content area has a light blue background. The title "IP Address Setting" is centered. Below the title, there is a "DHCP" dropdown menu set to "Disable". Underneath, there are three input fields: "IP Address" with the value "192.168.1.100", "Subnet Mask" with the value "255.255.255.0", and "Default Gateway" with the value "192.168.1.254". At the bottom, there are two buttons: "Apply" and "Help".

“IP Address” function includes four information and users are allowed to change these information:

- DHCP mode
 - Disable or enable DHCP mode
 - The value of this mode will decide whether the IP address is a static IP address or a dynamic IP address.
- IP address
- Subnet mask
- Default gateway

3.1.2 Switch Setting

Switch Setting		
Basic	Module Info	Misc Config
Model name	8+2G_SNMP	
Description	Intelligent 8+2G Switch	
MAC Address	00:03:79:FF:FA:03	
Firmware Version	V1.0-B15	
Board Type	8 VDSL Ports	
Hardware Version	HW Ver 1	

“Switch Setting” presents information of the switch in the following sub-functions. Note: only “Misc Config” section allows users to change the settings of the switch.

- Basic

Switch Setting		
Basic	Module Info	Misc Config
Model name	8+2G_SNMP	
Description	Intelligent 8+2G Switch	
MAC Address	00:03:79:FF:FA:03	
Firmware Version	V1.0-B15	
Board Type	8 VDSL Ports	
Hardware Version	HW Ver 1	

In “Basic” tab, the basic information of the MINI IP DSLAM is presented.

- Model name
- Description
- MAC address
- Firmware version
- Board type
- Hardware version

- Module Info

	TYPE	DESCRIPTION
Module1	8	GIGA COMBO
Module2	8	GIGA COMBO

This section shows the information of uplinks, Gigabit Ethernet 1 and Gigabit Ethernet 2.

Note: in the following contents, these two uplinks will be called Mod1 and Mod2.

- Misc Config

Switch Setting

Basic **Module Info** Misc Config

MAC Table Address Entry
Age-Out Time: 300 seconds (6~1572858,must multiple of 6,default is 300s)

Turn On Port Interval: 0 seconds (0~3600 seconds, interval time between turning off and turning on port for flooding CPU port, 0:disable)

Broadcast Storm Filter Mode: OFF

Broadcast Storm Filter Packet select

Broadcast Packets

IP Multicast

Control Packets

Flooded Unicast/Multicast Packets

Collisions Retry Forever : 16

Hash Algorithm : CRC-Hash

IP/MAC Binding : Disable

802.1x Protocol : Disable

Apply Default Help


Users are allowed to modify the following details of the switch.

- MAC address age-out time
 - This value is for setting up how many seconds that an inactive MAC address remains.
- Turn on port interval
 - This value for setting up the time interval that the CPU port should be enabled after flooding attacks. Note: 0 means never enable the CPU port.
- Broadcast storm filter mode
 - This feature is to set up the threshold value of broadcast traffic for ports.
 - Options: off, 1/2, 1/4, 1/8 or 1/16 (Note: the value is the percentage of the


- port's ingress bandwidth used by broadcast traffic.
- Broadcast storm filter packets select
 - This option allows users to choose the type of the target packet for broadcast storm filter mode.
 - If there is no type is chosen, this means broadcast storm filter mode is off.
 - Options: broadcast packets, IP multicast, control packets, and flooded unicast/multicast packets.
 - Collisions retry forever
 - This function will allow users to choose how many times the IP DSLAM should retry when a packet meets a collision.
 - Disable, 16, 32 or 48 collision number
 - Note: when the function is disabled, this means the IP DSLAM will retry for 6 times before packets are dropped. Otherwise, it will retry continuously until the packet is sent successfully.
 - Hash algorithm
 - This option is for choosing a hash algorithm for MAC address table.
 - CRC-Hash or DirectMap.
 - IP/MAC binding
 - This feature allows user to enable or disable IP/MAC binding function.
 - Enable or disable.
 - 802.1x protocol
 - 802.1x protocol is able to enable or disable via this option.
 - Enable or Disable.

Users are able to save the modified settings by clicking on “Apply” button. “Default” button is for restore the default settings; and “Help” button will provide some information about the features with another window.

3.1.3 Console Port Information

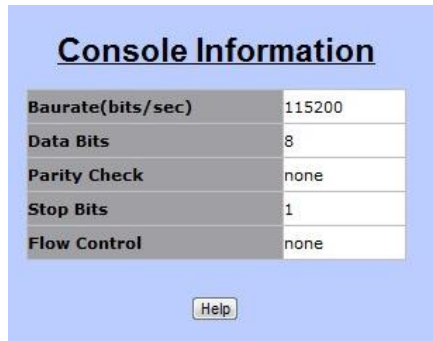

The section is for users to review the settings of console port, which lets users to connect and manage the MINI IP DSLAM in Command Line Interface (CLI) mode.

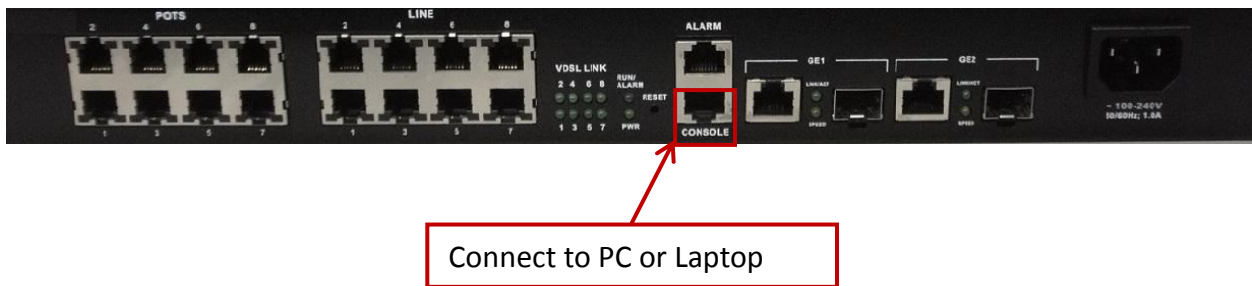

3.1.4 Port Configuration

“Port Configuration” section includes four detail functions of VDSL2 ports and Gigabit Ethernet ports:

- i. Port Controls
- ii. Port Sniffer
- iii. Protected Port
- iv. VDSL Port Status

● Port Controls

Port Control

Port	State	Negotiation	Speed	Duplex	Flow Control	Rate Control (Unit:128Kbps)		Security	BSF	Jumbo Frame
						Ingress	Egress			
Mod1 Mod2	Enable	Auto	1000	Full	Enable	0	0	<input type="checkbox"/>	Enable	Enable

Port	State	Link Negotiation	Speed	Duplex	Flow Control	Rate Control (Unit:128Kbps)		Security	BSF	Jumbo Frame
						Ingress	Egress			

“Port Control” is for users to setting up the details of Gigabit Ethernet ports and trunking ports if there exists any trunking ports. Users are allowed to configure the following parameters.

- State
 - This option will enable or disable the selected port.
 - Enable or Disable
 - Note: “Disable” means to turn off the selected port; and this means there will be no traffic going through this port.
- Negotiation
 - Users are able to decide whether Gigabit Ethernet ports should be auto-negotiable or not.
 - Options: auto or force
 - Note: If “force” mode is selected, users have to provide the information of “Speed” and “Duplex”.
- Speed
 - Users can setup the speed of Gigabit Ethernet ports in this function.
 - 10, 100 or 1000
- Duplex
 - Half or Full
- Flow Control
 - Options: enable or disable
 - Enable: send a PAUSE signal to the sender and halts the traffic for a period of time.
 - Disable: drop the exceed packets when there are too much packets to process.
- Rate Control
 - Users are able to set up the specific rate for both ingress and egress ports. Therefore, the MINI IP DSLAM will control the rate to meet the specified

rate.

- Note: the valid rate range is 0 ~ 8000; and the unit is 128Kbps.

- Security

- This function is to decide whether the IP DSLAM will forward all incoming packets from both secured MAC addresses and unknown MAC addresses.
- Options: enable or disable
- Enable: only packets from secured MAC addresses will be forwarded.
- Disable: all packets will be forwarded.

- BSF

- BSF stands for “Broadcast Storm Filtering”. It is able to enable or disable this function by port.
- Options: enable or disable

- Jumbo Frame

- Users are able to choose whether the IP DSLAM forwards jumbo frame packets or not.
- Options: enable or disable

● Port Sniffer

Port	Monitor
Port1	<input type="radio"/>
Port2	<input type="radio"/>
Port3	<input type="radio"/>
Port4	<input type="radio"/>
Port5	<input type="radio"/>
Port6	<input type="radio"/>
Port7	<input type="radio"/>
Port8	<input type="radio"/>
Mod1	<input type="radio"/>
Mod2	<input type="radio"/>

“Port Sniffer” is for monitoring a target port by mirroring or copying the data of the port and forwarding to an assigned port.

- Sniffer Type

- Options: Disable, Rx, TT, or Both.
- Users are able to choose what kind of data they would like to monitor.

- Analysis Port

- This port is for assigning the port which should receive the data.
- The analysis port will accept only copied packets from the monitored port.

- Port & Monitor

- This port is for assigning the port users would like to monitor.

● Protected Port

Protected Port Setting

Port ID	Protected	Group1	Group2
Port1	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>
Port2	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>
Port3	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>
Port4	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>
Port5	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>
Port6	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>
Port7	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>
Port8	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>
Mod1	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>
Mod2	<input type="checkbox"/>	<input checked="" type="radio"/>	<input type="radio"/>

“Protected Port” isolates a protected port from its neighbor ports and other ports in different protected groups. However, it is allowed for a protected port to communicate with other unprotected ports. By setting up protected ports, it is able to ensure that there is no traffic, such as unicast, broadcast, or multicast, between protected ports on the MINI IP DSLAM.

This function provides two protected port groups. Users are able to choose ports and assign to either group 1 or group 2.

- Options:

■ Protected

◆ Click on the corresponding checkbox to select a port.

■ Group1

◆ Click on the corresponding radio button for assigning a group.

■ Group2

◆ Click on the corresponding radio button for assigning a group.

● VDSL Port Status

Vdsl Port Status Status : Load OK

Port	Status	Upstream Rate (Unit:Kb/s)	Downstream Rate (Unit:Kb/s)	SNR Margin (US) (Unit:0.1db)	SNR Margin (DS) (Unit:0.1db)	Firmware Version	Detail
Port1	Idle	0	0	NA	NA	NA	Advance
Port2	Idle	0	0	NA	NA	NA	Advance
Port3	Idle	0	0	NA	NA	NA	Advance
Port4	Idle	0	0	NA	NA	NA	Advance
Port5	Idle	0	0	NA	NA	NA	Advance
Port6	Idle	0	0	NA	NA	NA	Advance
Port7	Idle	0	0	NA	NA	NA	Advance
Port8	Idle	0	0	NA	NA	NA	Advance

“VDSL Port Status” allows users to monitor the current information of each VDSL port, such as, status, upstream rate, downstream rate, SNR margins for upstream and downstream, and firmware version. In addition, it includes “Advance” button for checking the details of the selected port in another window, as the following.

-----UpStream-----	-----DownStream-----
Delay	Delay
INP	INP
CRC 15M	CRC 15M
CRC 1Delay	CRC 1Delay
CRC Total	CRC Total
Error Correction 15M	Error Correction 15M
Error Correction 1Delay	Error Correction 1Delay
Error Correction Total	Error Correction Total
xdsl2LineStatusPreDataRate	xdsl2LineStatusPreDataRate
xdsl2LineStatusAttainableRate	xdsl2LineStatusAttainableRate
xdsl2LineStatusElectricalLength	xdsl2LineStatusElectricalLength
xdsl2LineBandStatusSnrMargin	xdsl2LineBandStatusSnrMargin
xdsl2LineBandStatusSnrMargin	xdsl2LineBandStatusSnrMargin
xdsl2LineBandStatusSnrMargin	xdsl2LineBandStatusSnrMargin
xdsl2LineBandStatusSnrMargin	xdsl2LineBandStatusSnrMargin
xdsl2LineBandStatusSnrMargin	xdsl2LineBandStatusSnrMargin
xdsl2PMLCurr15MTimeElapsed	xdsl2PMLCurr15MTimeElapsed
xdsl2PMLCurr15MFec	xdsl2PMLCurr15MFec
xdsl2PMLCurr15MEs	xdsl2PMLCurr15MEs
xdsl2PMLCurr15MSes	xdsl2PMLCurr15MSes
xdsl2PMLCurr15MLoss	xdsl2PMLCurr15MLoss
xdsl2PMLCurr15MLas	xdsl2PMLCurr15MLas
xdsl2PMLCurr1DayTimeElapsed	xdsl2PMLCurr1DayTimeElapsed
xdsl2PMLCurr1DayFec	xdsl2PMLCurr1DayFec
xdsl2PMLCurr1DayEs	xdsl2PMLCurr1DayEs
xdsl2PMLCurr1DaySes	xdsl2PMLCurr1DaySes
xdsl2PMLCurr1DayLoss	xdsl2PMLCurr1DayLoss

3.1.5 SNMP Configuration

SNMP Configuration

System Options

Name:	Layer 2 Switch
Location:	No Location
Contact:	No Contact
SNMP Status:	Disable

Community Strings

Current Strings:	New Community String:
(none)	String: <input type="text"/>

“SNMP” stands for “Simple Network Management Protocol”, which is a standard protocol for managing network devices. SNMP is used commonly in Network Management Systems (as known as, NMS) to monitor network devices. In addition, MIBs

(Management Information Bases) is a kind of file which is used to store all the data of managed network devices in NMS according to SNMP standard protocols.

MINI IP DSLAM supports three versions of SNMP: SNMPv1, SNMPv2c and SNMPv3. In SNMP Configuration page, it includes the followings sections.

- System Options

- Name
 - The name of the MINI IP DSLAM
- Location
 - The location of the switch
- Contact
 - The contact information (the name of a person or organization)
- SNMP Status
 - Options: Enable or Disable
 - This option is for enabling or disabling SNMP function.

- Community Strings

This section is for setting up the password for accessing SNMP system.

- Current Strings
 - The list of existing password strings
- New Community String
 - For the information of a new password
 - String: password
 - Options: RO (read only) or RW (read and write)
- Add
 - Add button: for adding new information on the right hand side of the table to the community list.

- Remove
 - Remove button: for removing a password from the left hand side of the table.

- Trap Manager



- Current Managers
 - The list of existing SNMP servers.
- New Manager
 - The information of new trap manager.
 - IP Address: the IP address of the trap manager.
 - Community: the password for accessing the trap manager.
- Add
 - For adding new manager.
- Remove
 - For removing the information of existing manager.

- SNMPv3 Group



- Current Strings
 - The list of current SNMPv3 groups.
- SNMP Group
 - Group Name: the name of the SNMPv3 group.
 - V1/V2c/USM: the security model of this group.
 - Security Name: the security name string of this group.
- Add
 - For adding new SNMPv3 group.
- Remove

- For removing an existing SNMPv3 group.
- SNMPv3 View

“SNMPv3 view” is to offer or deny access to the complete features or parts of features of the MINI IP DSLAM.


- Current Strings
 - The name of current SNMPv3 views.
- SNMP View
 - View Name: the name of the new SNMPv3 view.
 - Included/Excluded: the OID should be included or excluded from the SNMP view.
 - View Subtree: the feature OID of this view.
 - View Mask: the subnet mask of this view.
- Add
 - For adding the new SNMPv3 view.
- Remove
 - For removing a selected SNMPv3 view from the current strings table.
- SNMPv3 Access

“SNMPv3 Access” section is for managing SNMPv3 access control, which is different from the access control defined by SNMPv1 and SNMPv2. SNMPv3 access sets up SNMP access levels based on contexts, groups and users, rather than on IP addresses and community strings.

- Current Strings

- The list of current SNMPv3 access list
- SNMP Access
 - Group Name: the group name of the new SNMPv3 access
 - V1/V2c/USM: the security model
 - ◆ V1: Reserved for SNMPv1
 - ◆ V2c: Reserved for SNMPv2c
 - ◆ USM: User-based Security Model
 - SNMP Access: the security model
 - ◆ Options: NoAuth/ Auth/ Authpriv
 - ◆ NoAuth: None authentication and none privacy
 - ◆ Auth: Authentication and none privacy
 - ◆ Authpriv: Authentication and privacy
 - Read View: the read view name.
 - Write View: the write view name.
 - Notify View: the notify view name.
- Add
 - For adding the new SNMPv3 access
- Remove
 - For removing an access from Current Strings list

● SNMPv3 USM-User

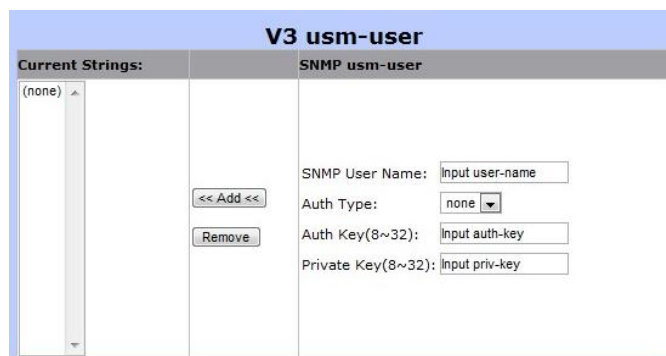

“SNMPv3 USM-User” section is for setting up the details of USM (User-based Security Model) security model. USM provides different types of security levels using various authentication and privacy protocols.

- Current Strings
 - The list of current SNMPv3 USM-user.
- SNMP usm-user
 - SNMP User Name
 - ◆ the name of new USM user
 - Auth Type
 - ◆ The authentication type

- ◆ Options: none or md5
- Auth Key
 - ◆ The authentication password of the USM user
- Private Key
 - ◆ The password for the privacy protocol type
- Add
 - For adding the new SNMPv3 USM-user
- Remove
 - For removing a SNMPv3 USM-user from the current list

3.1.6 Syslog Setting

“Syslog” function is supported in this MINI IP DSLAM system. The system will send logs to a remote log system. In this system, three events will be reported to the remote log system: cold start, warm start and link change. The followings are necessary for connecting the remote syslog server.

- Syslog server IP: the IP address of the remote syslog server IP.
- Log level:
 - Options: None, Major, or All
 - ◆ None: never send syslog message to syslog server.
 - ◆ Major: only send major syslog message to syslog server.
 - Link up or down
 - System warm start or cold start
 - ◆ All: send all syslog messages to syslog server.

3.1.7 Alarm Configuration

“Alarm Configuration” is distinguished into two tables: Configure Alarm Information and Alarm Information. Users are able to setup alarms and monitor alarm status.

- Configure Alarm Information (configuration section)
 - Alarm Item
 - Total of four alarms can be set in the MINI IP DSLAM
 - Admin
 - Options: Disable or Enable

- Security
 - The level of the alarm
- Title
 - The name of the alarm
- Alarm Information (monitor section)
 - Alarm Item
 - Admin
 - Security
 - Title

3.1.8 Temperatures & Fan Setting

Temperature and Fan Information	
Temperature Local	46 °C
Temperature Remote 1	54 °C
Temperature Remote 2	41 °C
Fan1 Status	Medium Speed(4000 RPM)
Fan2 Status	Medium Speed(4000 RPM)
Fan3 Status	Medium Speed(4000 RPM)


“Temperatures & Fan Status” allows users to monitor the real-time information of the MINI IP DSLAM’s temperatures and FANs.

3.1.9 Firmware Update

Note: Firmware update needs several minutes.
Please wait a while, then manually refresh the webpage.

“Firmware Update” allows users to upgrade firmware by themselves. Users are able to choose upgrading firmware through TFTP or HTTP.

3.1.10 Configuration Backup

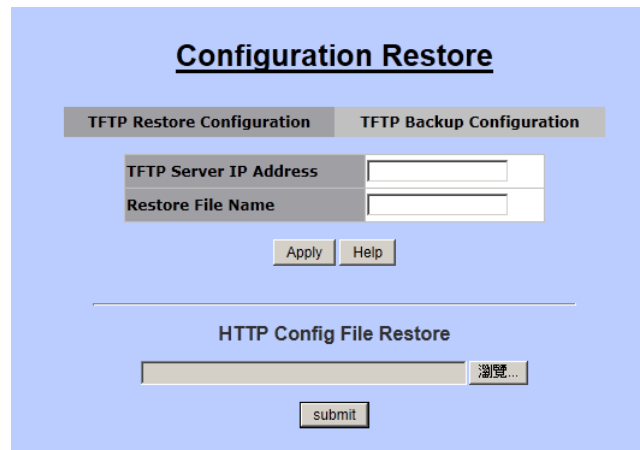


Users are able to load or backup configurations via “Configuration Restore” function. This function includes two tabs: “TFTP Restore Configuration” and “TFTP Backup Configuration”.

- TFTP Restore Configuration



This section is for load the settings from a configuration file. Users are able to upload the settings by TFTP or HTTP.

- TFTP Backup Configuration

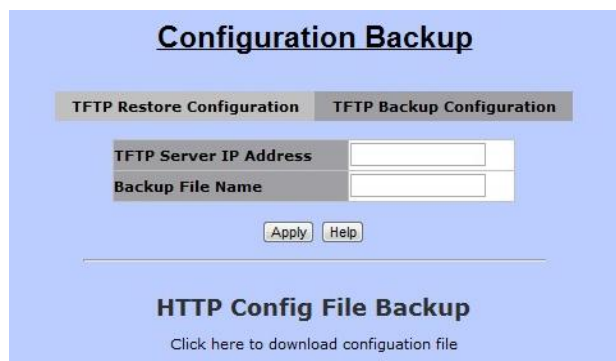

This area allows users to download the current configuration through TFTP or HTTP.

3.1.11 SNTP Setting

SNTP Setting	
SNTP	Disable ▾
SNTP server IP	<input type="text"/>
UTC Type	Before-UTC ▾
Time Range(0~24)	0
Time	<input type="text"/>
<input type="button" value="Apply"/> <input type="button" value="Help"/>	

SNTP stands for “Simple Network Time Protocol”. SNTP is a simpler version of “Network Time Protocol” (NTP), which is a system for synchronizing the clocks of network computer systems. By enabling SNTP function, users are able to configure this switch to send time synchronization requests to the assigned servers with servers’ IP addresses.

- SNTP
 - To enable or disable SNTP feature.
 - Options: Enable or Disable.
- SNTP server IP
 - The IP address of the assigned SNTP server.
- UTC Type
 - To decide the time zone.
 - Options:
 - ◆ After-UTC: UTC+hh (hh: hours)
 - For example, Taipei (UTC+08), choose “After-UTC”.
 - ◆ Before-UTC: UTC-hh (hh: hours)
 - For example, San Francisco (UTC-08), choose “Before-UTC”.
- Time Range
 - This field is for setting up the hour data in “UTC-hh/UTC+hh”.
 - ◆ For example, UTC-08, then, choose “Before-UTC” in UTC type and fill in “8” in Time Range.
- Time
 - This section is for displaying the current time once the switch is connected to the assigned NTP server.

3.2 L2 Features

8 Port Mini IP DSLAM offers a flexible L2 features, as the following functions:

- VLAN Configuration
- Trunking
- Forwarding & Filtering
- IGMP Snooping
- Spanning Tree
- DHCP Relay & Opt.82

3.2.1 VLAN Configuration


“VLAN” stands for “Virtual Local Area Network” or “virtual LAN”. It is a concept of separating and grouping LAN segments by a common set of requirements. VLAN presents couple benefits, such as, simplifying network design, enhancing bandwidth performance and improving, etc.



The MINI IP DSLAM supports three kinds of VLAN algorithms:


- Static VLAN
- GVRP VLAN
- QinQ VLAN

3.2.1.1 Static VLAN

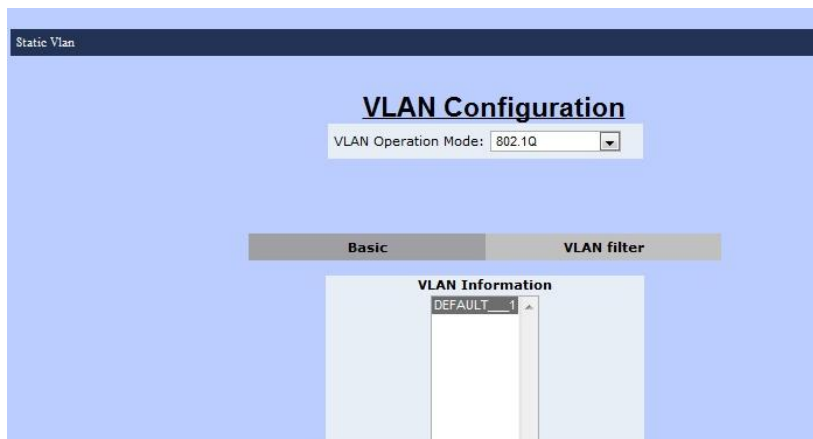

Static VLAN function allows users to setup and manage VLAN groups manually.


- VLAN Operation Mode
 - No VLAN
 - To disable VLAN mode.
 - Port-Based VLAN
 - To setup VLAN groups by ports.
 - 802.1Q VLAN
 - To setup VLAN groups by 802.1Q VLAN tags.
- Basic

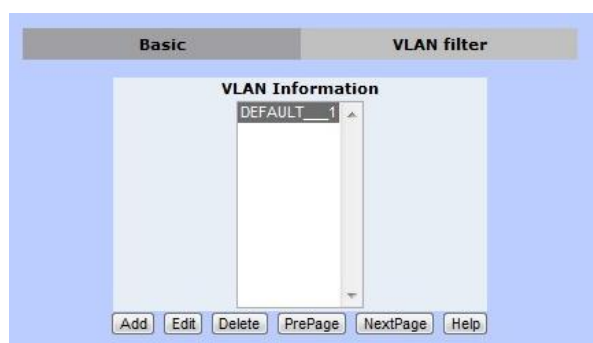

“VLAN Information” displays all VLAN groups stored already. The following buttons allow users to manage VLAN groups.

Note: The VLAN mode of VLAN operation mode is the global setting of “Basic” and “VLAN Filter”.


- Add

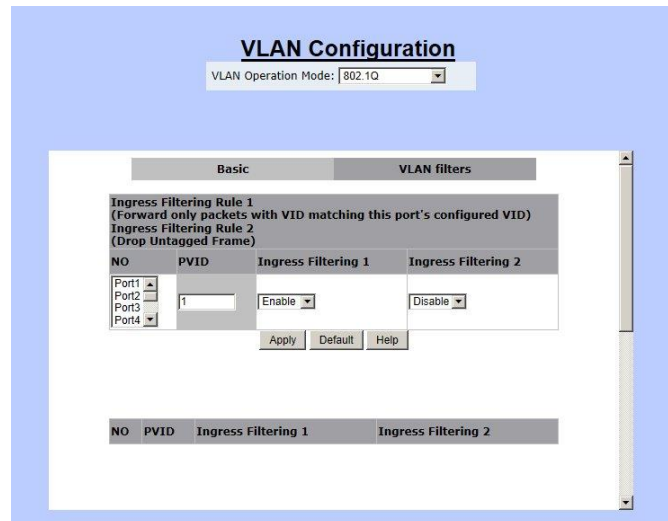

- To create a new VLAN group.


Name	Description
VLAN Name	The name of this VLAN group
VID	VLAN ID
VLAN Members	There are three columns in this section. <ul style="list-style-type: none"> ➤ Ports (left-hand side): Port1 ~ Port8, Mod1, Mod2 ➤ Add or Remove (middle): for adding or removing a port ➤ Selected Ports (right-hand side): the VLAN group members
CPU Port	Click on this checkbox to choose this VLAN group as the management group of this MINI IP DSLAM.

- Click "Apply" to set up tag mode.



- Edit
 - To change the settings of an existing VLAN group.
- Delete
 - To remove an existing VLAN group.
- PrePage
 - To move to the previous page of VLAN information table.
- NextPage
 - To move to the following page of VLAN information table.
- Help
 - To open FAQ page of VLAN configuration.

- VLAN filter

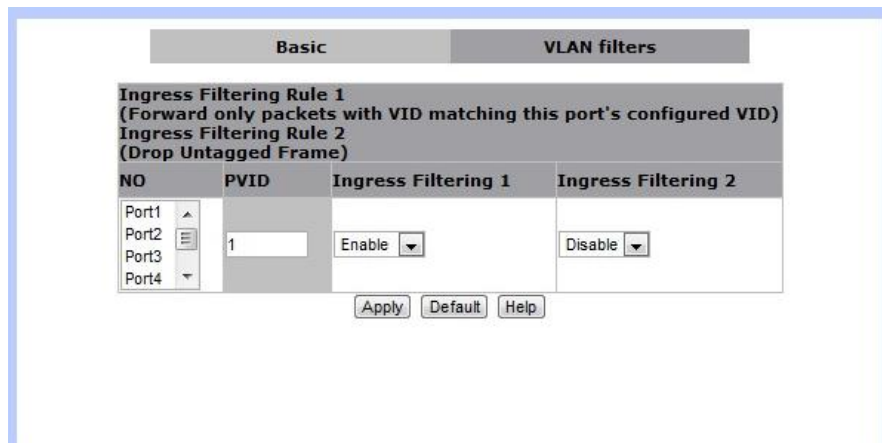


VLAN filter function is for setting the filtering rules for all ports (Port1 ~ Port8, Mod1 and Mod2).

Users are able to define filtering rules for each port.




- NO

- The list of available ports.
- Click on a port to change the details. In addition, the current setups will be showed in a different table right next to the setup table.

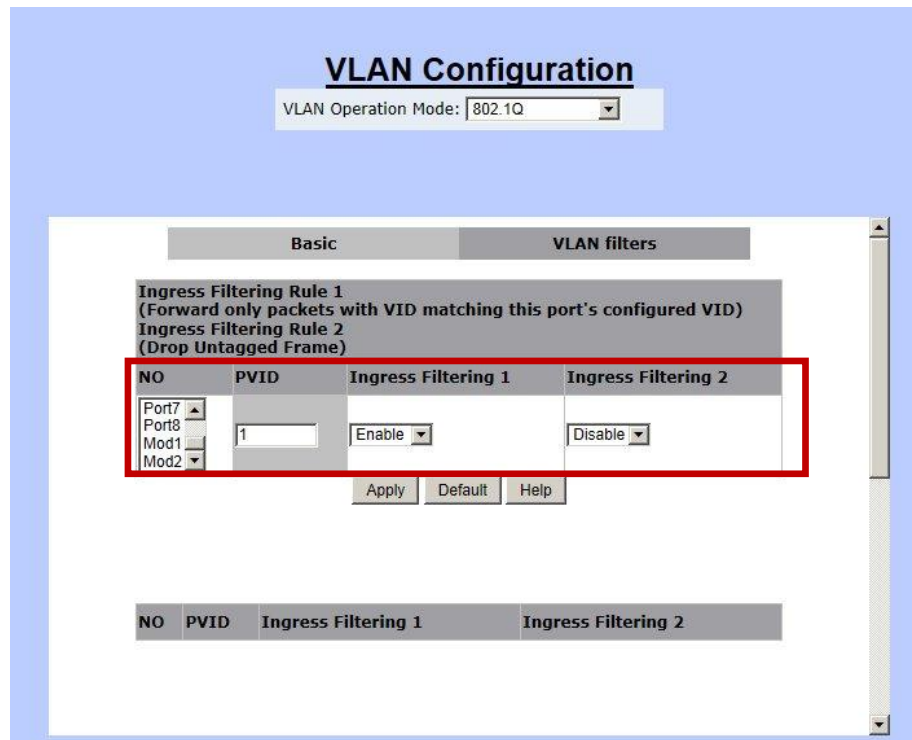


- PVID
 - The VLAN ID of ingress packets.
- Two filtering rules are available in VLAN Filtering function of this MINI IP DSLAM.
- Ingress Filtering 1
 - Only these ingress packets with the assigned VLAN ID are able to pass through this port.
 - Options: Enable or Disable (disable filtering function)
 - Ingress Filtering 2
 - Enabling this rule will drop all untagged packets.
 - Options: Enable (only packets with the assigned VLAN ID can pass through this port) or Disable (accept all packets)

3.2.1.2 GVRP VLAN

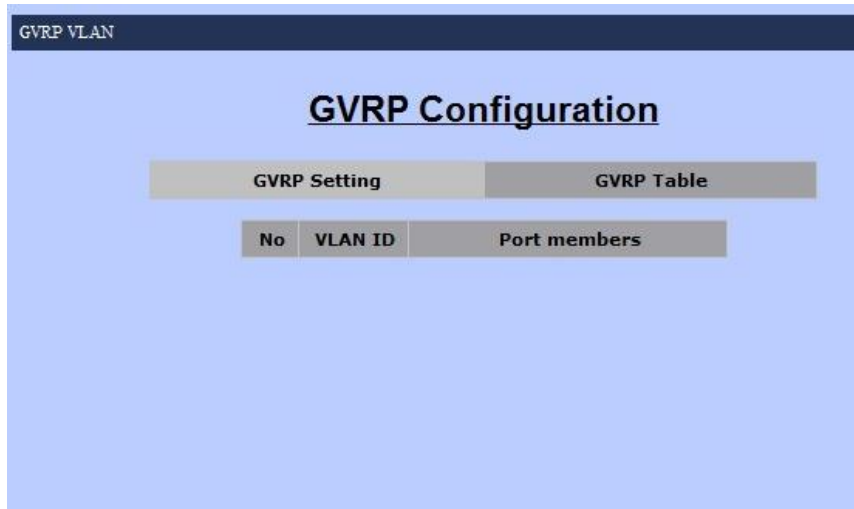

GVRP stands for “GARP (Generic Attribute Registration Protocol) VLAN Registration Protocol” or “Generic VLAN Registration Protocol”. GVRP VLAN method follows IEEE 802.1Q specification and defines tagging frames with VLAN configuration data. This meaning allows MINI IP DSLAM to exchange VLAN configuration information with other network devices dynamically.

- GVRP Setting
 - For setting up GVRP configurations

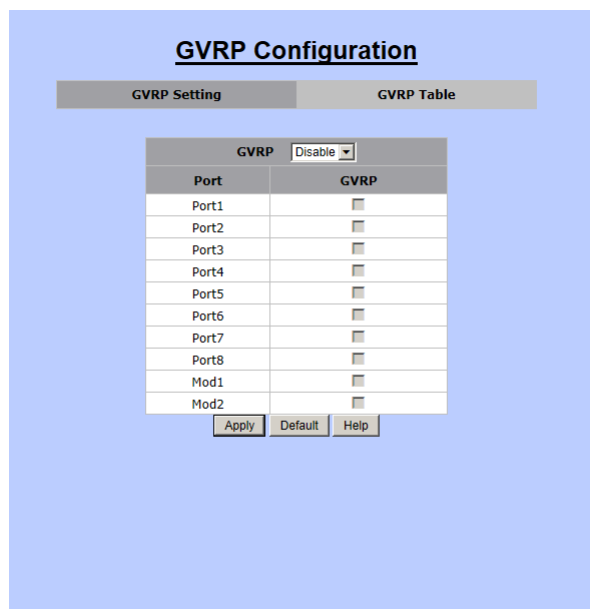


- ◆ GVRP
 - Options: Enable or Disable
- ◆ Port & GVRP
 - Port1 ~ Port8, Mod1, Mod2 & corresponding checkbox.
 - Click on the checkboxes to choose GVRP group members.

- ◆ Apply
 - To save the modifications.
- ◆ Default
 - To restore default settings.
- ◆ Help
 - To open the FAQ page of GVRP VLAN.

- GVRP Table

- This table is for displaying current GVRP VLAN information.

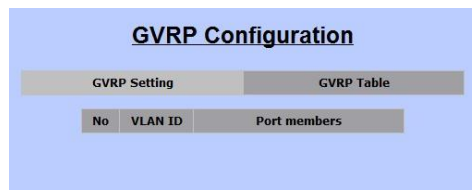


The screenshot shows a web interface titled "GVRP Configuration". It has two tabs: "GVRP Setting" and "GVRP Table", with "GVRP Table" selected. Below the tabs is a table with three columns: "No", "VLAN ID", and "Port members".

No	VLAN ID	Port members
----	---------	--------------


- GVRP will learn VLAN ID and its group member automatically. This table will show this information.

3.2.1.3 QinQ VLAN

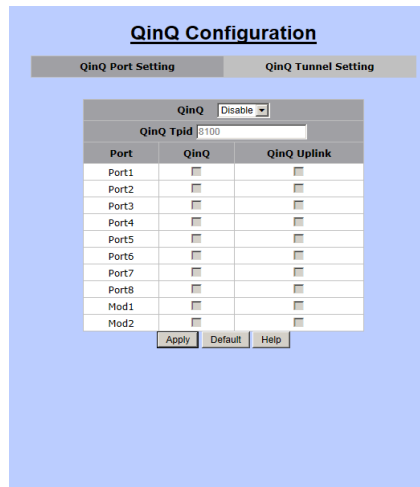


QinQ VLAN function allows users or service providers to separate traffic service for different customers by adding service provide VLAN tags and customer VLAN IDs. In this function, settings are divided into two parts:

- QinQ Port Setting
- QinQ Tunnel Setting

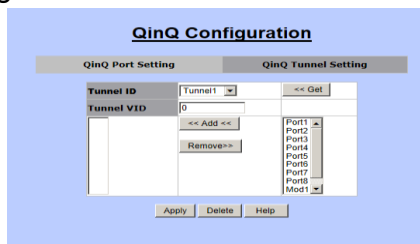


- QinQ Port Setting

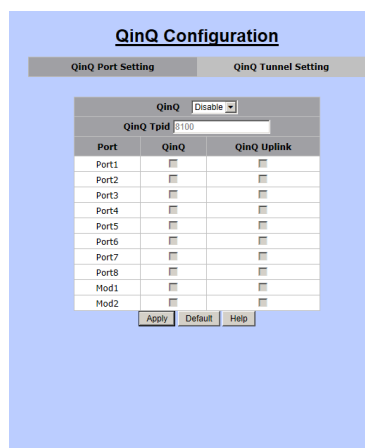

- This section is for setting up QinQ mode, TPID, and group members.
- The followings are the details that are required to be filled in for setting QinQ function.
 - ◆ QinQ: Disable or Enable

- ◆ Qinq TPID:
 - TPID stands for “Tag Protocol Identifier”.
 - TPID is the Ethertype value for 802.1Q encapsulation.
 - Standard Ethertype value: 0x8100 (Default value)
 - Range: 0x0800 ~ 0xFFFF (hexadecimal value).
- ◆ Port Table:
 - Qinq: for choosing which port should be enabled with Qinq mode.
 - Qinq Uplink: for setting up an uplink port of this Qinq group.

- Qinq Tunnel Setting

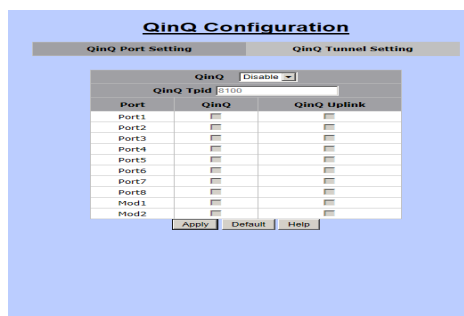

“Qinq Tunnel” is for service providers who carry traffic of multiple customers across their networks and are required to maintain VLAN and Layer 2 protocol configurations for each customer.

- Tunnel ID
- Tunnel VID
- Port List: choose user port and uplink port.



3.2.2 Trunking

The screenshot displays the 'Trunking' configuration page with three tabs: 'Aggregator Setting', 'Aggregator information', and 'State Activity'. The 'Aggregator Setting' tab is active. It contains a 'LACP' checkbox (unchecked) and a 'System Priority' text input field with the value '32768'. Below this is a table for configuring a trunk group:

Group ID	1	<< Get
Lacp	Disable	
Work Ports	0	
	<< Add <<	Port1 Port2 Port3 Port4 Port5 Port6 Port7 Port8 Mod1
	Remove>>	

At the bottom of the form are three buttons: 'Apply', 'Delete', and 'Help'.

Trunking function allows users to combine several ports or connections together to create one single connection which has a higher and faster connection speed. “Trunking” is also called “Link Aggregation”. Two trunking techniques are available in this MINI IP DSLAM:

- Static Trunk
- LACP

- Aggregator Setting


This is a duplicate of the screenshot above, showing the 'Trunking' configuration page with the 'Aggregator Setting' tab selected. It details the LACP checkbox, System Priority field, and the table for configuring a trunk group with Group ID, LACP mode, Work Ports, and a list of available ports (Port1-8, Mod1).

- This section allows users to setup trunking groups and details.
- The following information is needed for setting up a trunk group.

- ◆ LACP (checkbox): for enable or disable LACP algorithm by check on the checkbox.
- ◆ System Priority: this value is for identifying the active LACP of this MINI IP DSLAM. (Note: the lowest value presents the highest priority.)
- ◆ Trunk Group Table
 - Group ID: the trunk group ID (1~13)
 - LACP: Enable or Disable LACP algorithm for this trunk group.
 - Work Ports: the total port number of the group member. (Please select the group number in the following port list.)

The screenshot shows a configuration interface for LACP. It includes a 'Group ID' dropdown set to '1', a 'LACP' dropdown set to 'Disable', and a 'Work Ports' input field set to '0'. There are buttons for '<< Get', '<< Add <<', and 'Remove >>'. A list of ports (Port1 to Port8, Mod1) is shown on the right. Red callouts point to the 'Selected Port List' (empty box) and the 'Port List' (list of ports).

- Aggregator information

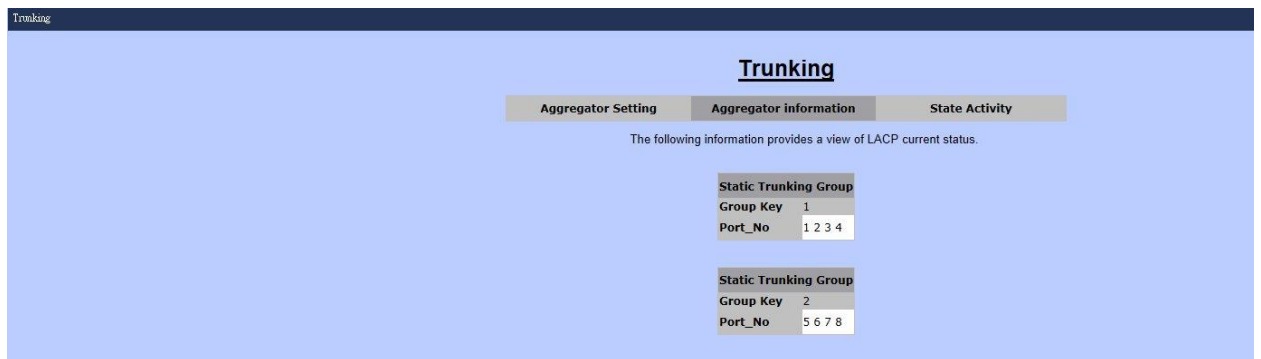


- This section allows users to review trunk information.
- Two data are reviewed in this section:
 - ◆ Group Key: the trunk group ID.
 - ◆ Port No: the port member of this trunk group. (Port1 ~ Port8, Mod1, Mod2)

- Static Activity

Port	LACP State Activity	Port	LACP State Activity
1	N/A	2	N/A
3	N/A	4	N/A
5	N/A	6	N/A
7	N/A	8	N/A
9	N/A	10	N/A


- This area is for setting up LACP mode (active or passive)
 - ◆ Active: the active port will send LACP packets automatically.
 - ◆ Passive: the passive port will not send LACP packets but it will respond if and only if it receives LACP packets from the other end.

3.2.3 Forwarding & Filtering

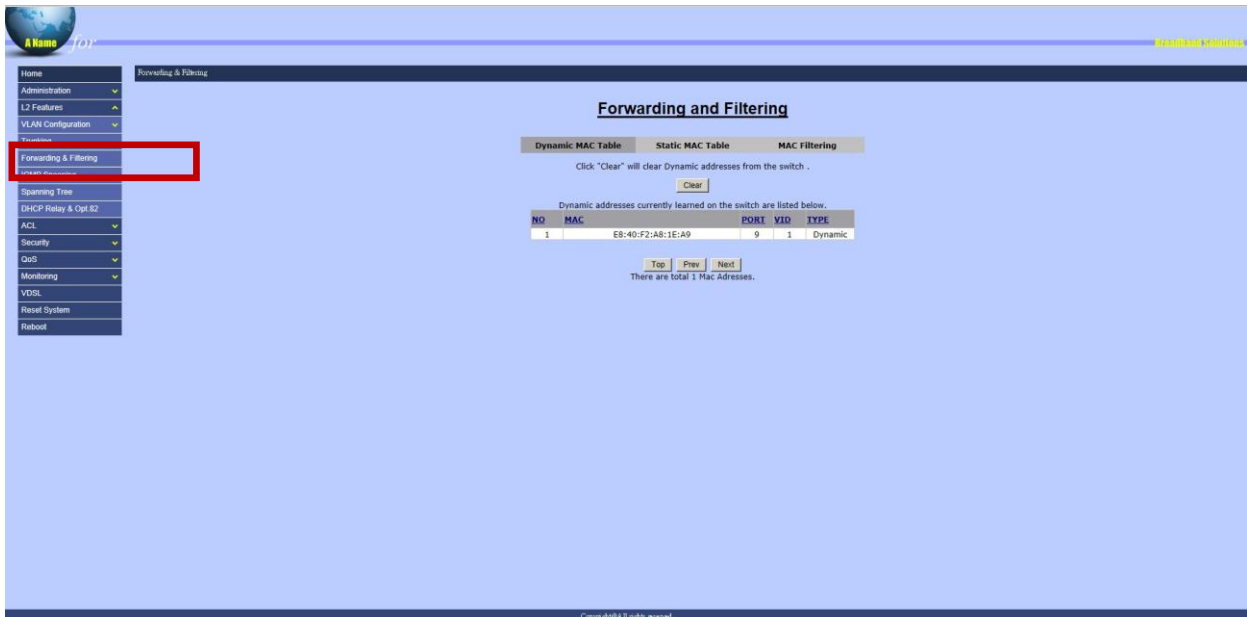


“Forwarding & Filtering” function is for users to setup rules about packets. Four ways to setup these rules:

- Dynamic MAC Table
 - Static MAC Table
 - MAC Filtering
- Dynamic MAC Table

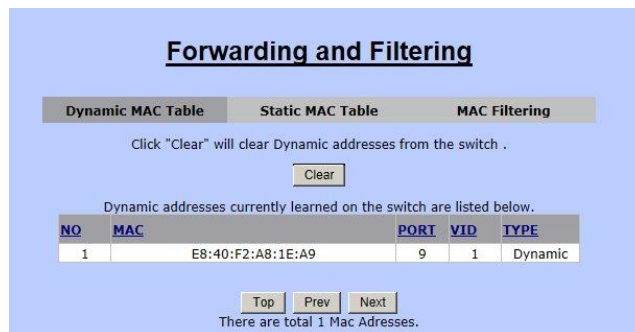

- The MINI IP DSLAM will learn devices’ MAC addresses dynamically and record these addresses into MAC address table. This section will show all the found MAC addresses as the following table.

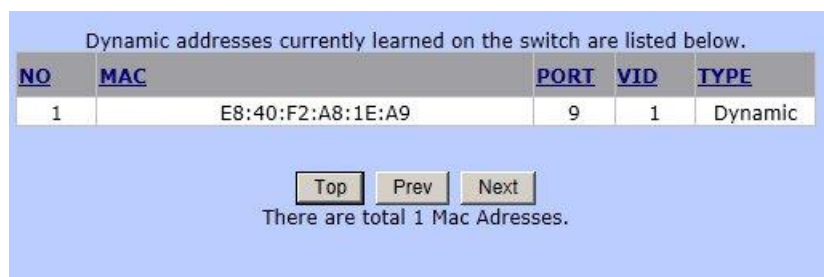

- Clear: to clear the dynamic MAC address table.

- Top: to show the first page of the MAC address table.
- Prev: to go to the previous page of the MAC address table.
- Next: to go to the next page of the MAC address table. (Note: if there is nothing showed, it means this is the end page.)

- Static MAC Table

Dynamic MAC Table **Static MAC Table** MAC Filtering

Dynamic addresses currently defined on the switch are listed below.
Click Add to add a new static entry to the address table.

MAC Address	PORT	VID
-------------	------	-----

MAC Address

Port num

VLAN ID

- Users are able to fill up the MAC addresses of devices connected to the switch. By adding a static MAC address, the switch will save the information permanently and will not attend to learn the MAC address of this device when the device is online.

Dynamic MAC Table **Static MAC Table** MAC Filtering

Dynamic addresses currently defined on the switch are listed below.
Click Add to add a new static entry to the address table.


MAC Address	PORT	VID
E8:40:F2:A8:1E:A9	25	1

MAC Address

Port num

VLAN ID

- MAC Filtering

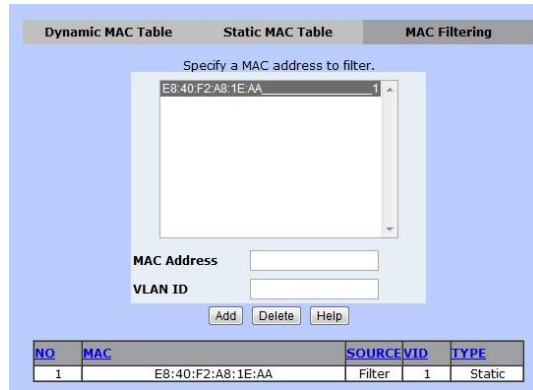


- Users are able to define and drop unwanted traffic in “MAC Filtering” function.

3.2.4 IGMP Snooping



“IGMP” stands for “Internet Group Management Protocol”. IGMP allows hosts and routers to build multicast group memberships. IGMP snooping presents the process of IGMP network traffic listening. With this feature, MINI IP DSLAM is able to listen to IGMP conversation between hosts and routers. The switch is able to maintain a relation map of links and IP multicast streams.

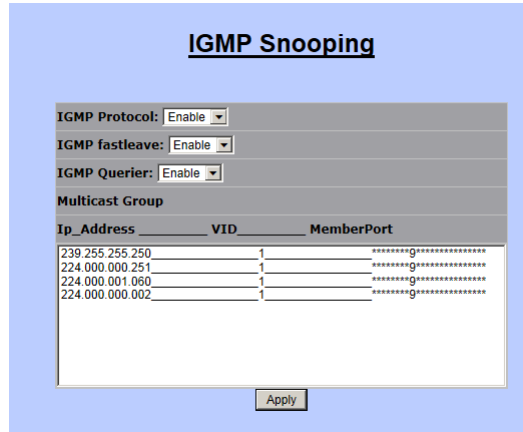

The following settings are needed in order to allow IGMP snooping work properly.

- IGMP Protocol: to enable or disable IGMP function.
- IGMP Fastleave: to enable or disable IGMP Fastleave mode.
- IGMP Querier: to enable or disable IGMP Querier mode.
- Multicast Group: the multicast group list table.

3.2.5 Spanning Tree

The screenshot shows the 'Spanning Tree' configuration page. The left sidebar has a menu with 'Spanning Tree' highlighted. The main content area is titled 'Spanning Tree' and has four tabs: 'System Configuration', 'PerPort Configuration', 'Instance', and 'Interface'. The 'System Configuration' tab is active, showing 'Configure Spanning Tree Parameters' and 'Root Bridge Information' sections.

Configure Spanning Tree Parameters	
STP State (Default DISABLE)	<input type="checkbox"/>
STP protocol version (Default MSTP)	MSTP
Region Name(Max. 32 chars.)	
Revision Level (0-65535)	0
Max Hops (1-40)	20
Priority (0-61440; Default 32768)	32768
Maximum Age (6-40; Default 20)	20
Hello Time (1-10; Default 2)	2
Forward Delay (4-30; Default 15)	15
Apply Help	

Root Bridge Information	
Priority	32768
MAC Address	00:03:79:FF:FA:03
Region Name	
Revision Level	0
Max Hops	20
Root Path Cost	0
Root Port	0
Maximum Age	20
Hello Time	2
Forward Delay	15

Spanning Tree (also known as, STP) is a network protocol which is defined by IEEE 802.1 D standards for preventing bridge loops and broadcast radiation. In addition, STP allows redundant links to provide automatic backups. Most commonly known STP algorithms are STP (Spanning Tree Protocol), RSTP (Rapid Spanning Tree Protocol), and MSTP (Multiple Spanning Tree Protocol). This MINI IP DSLAM supports both STP and MSTP. In addition, in this Switch, users are able to set up STP either for the whole system of the Switch or for each individual port.

The screenshot shows the 'Spanning Tree' configuration page with the 'System Configuration' tab active. The 'Configure Spanning Tree Parameters' section has 'STP State' checked. The 'Root Bridge Information' section shows a priority of 32768 and a MAC address of 10:23:22:33:44:55.

Configure Spanning Tree Parameters	
STP State (Default DISABLE)	<input checked="" type="checkbox"/>
STP protocol version (Default MSTP)	MSTP
Region Name(Max. 32 chars.)	
Revision Level (0-65535)	0
Max Hops (1-40)	20
Priority (0-61440; Default 32768)	32768
Maximum Age (6-40; Default 20)	20
Hello Time (1-10; Default 2)	2
Forward Delay (4-30; Default 15)	15
Apply Help	

Root Bridge Information	
Priority	32768
MAC Address	10:23:22:33:44:55
Region Name	

In Spanning Tree function, there are four major setup pages as the following sections.

- System Configuration
- PerPort Configuration
- Instance
- Interface

3.2.5.1 System Configuration

“System Configuration” allows users setting up the details of STP function. In addition, the information of the root node of the STP will be displayed in this page.

- Configure Spanning Tree Parameters
 - STP State
 - ◆ To enable or disable STP function.
 - ◆ Note: to enable STP function, users are required to click on this checkbox and press “Apply” button. Then, after the saving process is completed, users are able to fill up the rest of the information.
 - STP protocol version
 - ◆ STP or MSTP
 - Region Name
 - ◆ Name of STP tree
 - Revision Level
 - ◆ The level of STP tree
 - Max Hops
 - ◆ Hop number
 - Priority
 - Maximum Age
 - ◆ The waiting time (seconds) before the switch attempts to reconfigure.
 - Hello Time
 - ◆ The time (seconds) the switch will send BPDU packets to check STP current status.
 - Forward Delay
- Root Bridge Information
 - Priority
 - MAC Address
 - Region Name

- Revision Level
- Max Hops
- Root Path Cost
- Maximum Age
- Hello Time
- Forward Delay

3.2.5.2 PerPort Configuration

Spanning Tree

System Configuration		PerPort Configuration		Instance		Interface	
Configure Spanning Tree Port Parameters							
Port Number	Path Cost (1-200000000)	Priority (0 - 240; Default 128)	Admin Edge (Default NO)	Admin Non-STP (Default NO)	Admin P2P (Default AUTO)	Migration Check	
<div style="border: 1px solid gray; padding: 2px;"> Port1 ▲ Port2 ▲ Port3 ▲ Port4 ▲ Port5 ▼ </div>	200000	128	NO ▼	NO ▼	AUTO ▼	NO ▼	
<input type="button" value="Apply"/> <input type="button" value="Help"/>							
STP Port Status							
PortNum	PathCost	Priority	PortState	PortEdge	PortNonSTP	PortP2P	Migration Check
Port1	0	128	Forwarding	NO	NO	NO	NO
Port2	0	128	Forwarding	NO	NO	NO	NO
Port3	0	128	Forwarding	NO	NO	NO	NO
Port4	0	128	Forwarding	NO	NO	NO	NO
Port5	0	128	Forwarding	NO	NO	NO	NO
Port6	0	128	Forwarding	NO	NO	NO	NO
Port7	0	128	Forwarding	NO	NO	NO	NO
Port8	0	128	Forwarding	NO	NO	NO	NO
Mod1	0	128	Forwarding	NO	NO	NO	NO
Mod2	0	128	Forwarding	NO	NO	NO	NO

“PerPort Configuration” is for setting up Spanning Tree mode for each individual port.

3.2.5.3 Instance

Spanning Tree

System Configuration PerPort Configuration **Instance** Interface

Configure Spanning Tree Instance

Instance	Bridge Priority (0-61440)	Status	VLAN Range
Instance0	32768	Enable	
Instance1			
Instance2			
Instance3			
Instance4			

Apply Help

STP Instance

Instance	Bridge Priority	Status	VLAN Range
Instance0	32768	Enable	1-4094
Instance1	32768	Disable	
Instance2	32768	Disable	
Instance3	32768	Disable	
Instance4	32768	Disable	
Instance5	32768	Disable	
Instance6	32768	Disable	
Instance7	32768	Disable	

“Instance” function is a part of MSTP function. MSTP allows users to map a group of VLANs into a single Multiple Spanning Tree Instance (MSTI). This means the spanning tree protocol is applied separately for a set of VLANs instead of the whole network.

3.2.5.4 Interface

Spanning Tree

System Configuration PerPort Configuration Instance **Interface**

MSTP Port Priority and Path Cost Settings

Instance	0
Port Number	Port1
Port Priority(0~240)	128
Path Cost(1~200000000)	0

Save Setting Help

Instance 0

Port	Path Cost	Priority	PortStatus	Port Role
Port1	200000	128	Disabled	Disabled
Port2	200000	128	Disabled	Disabled
Port3	200000	128	Disabled	Disabled
Port4	200000	128	Disabled	Disabled

“Interface” is for MSTP, too. In this section, users are allowed to configure MSTP port priority and path cost settings of “Instance”.

3.2.6 DHCP Relay & Opt.82

The screenshot shows the configuration page for DHCP Relay & Option 82. The left sidebar has a menu with 'DHCP Relay & Opt.82' highlighted. The main content area is titled 'DHCP Relay & Option 82' and contains the following configuration options:

- DHCP Option 82:
- DHCP Relay:
- DHCP Option 82 Router Port:

Below these options is a table with the following columns: DHCP Opt.82 Port, Option, and Relay IP.

DHCP Opt.82 Port	Option	Relay IP
Port1	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port2	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port3	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port4	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port5	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port6	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port7	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port8	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Mod1	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Mod2	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>

At the bottom of the page are three buttons: 'Apply', 'Default', and 'Help'.

“DHCP” stands for “Dynamic Host Configuration Protocol”, which is a network protocol that is for configuring network devices dynamically so these devices can communicate on an IP network. It is a service that runs at the application layer of TCP/IP protocol stack to assign IP addresses to its clients dynamically.

“DHCP Relay” will forward DHCP broadcasts to multiple DHCP servers in different subnets using unicasts. By doing so, DHCP clients on subnets not directly served by DHCP servers can communicate with DHCP servers. In addition, “DHCP Relay Information Options 82”, is defined in RFC 3046 and RFC 3993, allows a DHCP Relay agent to insert circuit specific information to a request which is forwarded to a DHCP server.

DHCP Relay & Option 82

DHCP Option 82 Disable ▾

DHCP Relay Disable ▾

DHCP Option 82 Router Port Port1 ▾

DHCP Opt.82 Port	Option	Relay IP
Port1	<input type="checkbox"/>	0.0.0.0
Port2	<input type="checkbox"/>	0.0.0.0
Port3	<input type="checkbox"/>	0.0.0.0
Port4	<input type="checkbox"/>	0.0.0.0
Port5	<input type="checkbox"/>	0.0.0.0
Port6	<input type="checkbox"/>	0.0.0.0
Port7	<input type="checkbox"/>	0.0.0.0
Port8	<input type="checkbox"/>	0.0.0.0
Mod1	<input type="checkbox"/>	0.0.0.0
Mod2	<input type="checkbox"/>	0.0.0.0

Apply Default Help

3.2.6.1 DHCP Option 82

DHCP Option 82 Disable ▾

Users are allowed to enable or disable DHCP Option 82 by choosing the options in the drop-down menu. To setup DHCP Option 82 for this switch, users are required to enable this option first.

3.2.6.2 DHCP Relay

DHCP Relay Disable ▾

DHCP Relay is for enabling or disabling DHCP Relay function.

3.2.6.3 DHCP Option 82 Router Port

DHCP Option 82 Router Port Port1 ▾

“DHCP Option 82 Router Port” allows users to choose the relay port for DHCP Option 82 feature. Users are able to specific one port between Port1 to Port8 or Mod1 to Mod2.


3.2.6.4 DHCP Opt. 82 Port Table

DHCP Option 82 <input type="button" value="Disable"/>		
DHCP Relay <input type="button" value="Disable"/>		
DHCP Option 82 Router Port <input type="button" value="Port1"/>		
DHCP Opt.82 Port	Option	Relay IP
Port1	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port2	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port3	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port4	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port5	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port6	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port7	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Port8	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Mod1	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>
Mod2	<input type="checkbox"/>	<input type="text" value="0.0.0.0"/>

This section is for defining DHCP Option 82 and port information.


- Option: the checkbox for enabling or disabling DHCP Relay Information Option 82 function.
- Relay IP: for assign the IP address of the port.

3.3 ACL

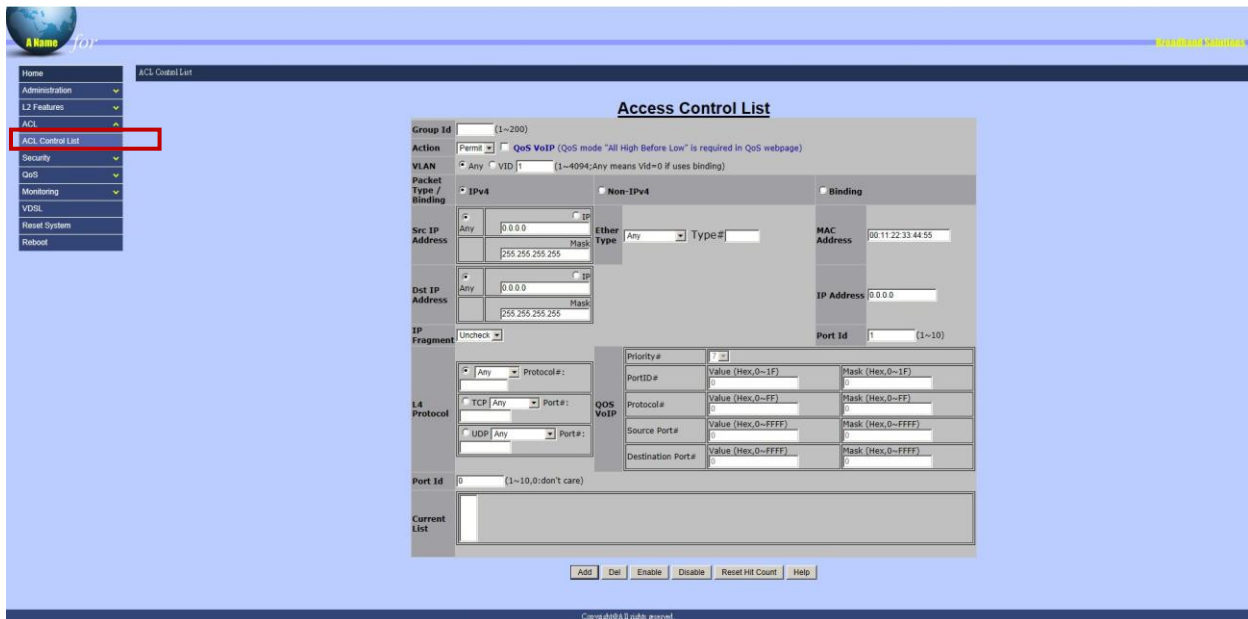

Packets can be forwarded or dropped by ACL rules include IPv4 or non-IPv4. The switch can be used to block packets by maintaining a table of packet fragments indexed by source and destination IP address, protocol, and so on.

There are 2 main ACL rule types to setup: Packet Type (IPv4 and Non-IPv4) and Binding (SIP-SMAC-Port).

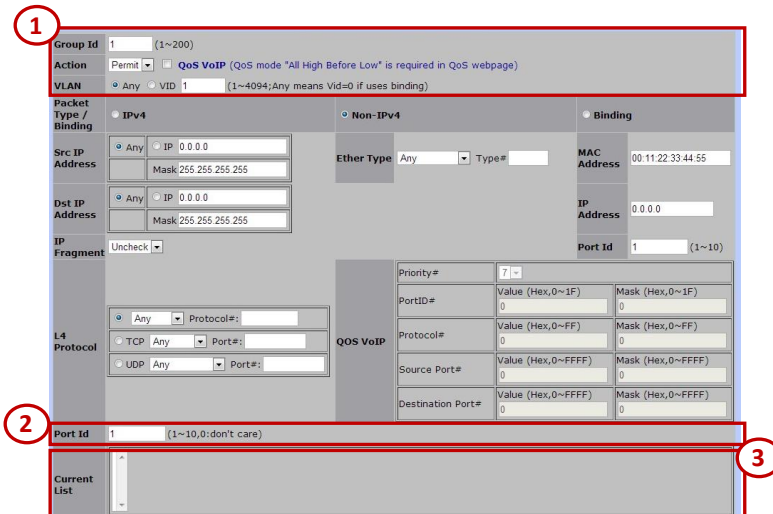

Section 1:

- Group ID: the ID of this Access Control List (1 ~ 200).
- Action: Permit or Deny the access
- VLAN: Any or VID (a specific VLAN ID)

Section 2:

- Port ID: the target port of this access control list should be applied to. (0: don't care/1 ~ 10)

Section 3:

- Current List: the current list of all access control lists.

3.3.1 IPv4

- Packet Type/ Binding
 - The option of “IPv4” is selected.
- SRC IP Address
 - Options: Any or a specific IP address
 - The rule should be applied on these packets from which IP address or any IP address.
- DST IP Address
 - Options: Any or a specific IP address
 - The rule should be applied on these packets with an assigned destination IP address or any IP address.
- IP Fragment
 - Options: Uncheck or Check
 - To decide whether IP fragment should be checked or not.
- L4 Protocol
 - Options are as the following table

L4 Protocol Type	Options	Data
Any	Any, ICMP, or IGMP	Protocol No.
TCP	Any, FTP, or HTTP	Port No.
UDP	Any, DHCP, TFTP, NetBIOS	Port No.

3.3.2 Non-IPv4

Group Id 1 (1~200)

Action Permt QoS VoIP (QoS mode "All High Before Low" is required in QoS webpage)

VLAN Any VID 1 (1~4094;Any means Vid=0 if uses binding)

Packet Type / Binding IPv4 Non-IPv4 Binding

Src IP Address Any IP 0.0.0.0 Mask 255.255.255.255

Dst IP Address Any IP 0.0.0.0 Mask 255.255.255.255

IP Fragment Uncheck

L4 Protocol Any TCP Any UDP Any

Port ID 1 (1~10,0:don't care)

Current List

Ether Type Any Type#

MAC Address 00:11:22:33:44:55

IP Address 0.0.0.0

Port ID 1 (1~10)

QoS VoIP

Priority#	7	
PortID#	Value (Hex,0~1F)	Mask (Hex,0~1F)
	0	0
Protocol#	Value (Hex,0~FF)	Mask (Hex,0~FF)
	0	0
Source Port#	Value (Hex,0~FFFF)	Mask (Hex,0~FFFF)
	0	0
Destination Port#	Value (Hex,0~FFFF)	Mask (Hex,0~FFFF)
	0	0

- Ether Type
 - Options: Any, ARP, or IPX

3.3.3 Binding

Group Id 1 (1~200)

Action Permt QoS VoIP (QoS mode "All High Before Low" is required in QoS webpage)

VLAN Any VID 1 (1~4094;Any means Vid=0 if uses binding)

Packet Type / Binding IPv4 Non-IPv4 Binding

Src IP Address Any IP 0.0.0.0 Mask 255.255.255.255

Dst IP Address Any IP 0.0.0.0 Mask 255.255.255.255

IP Fragment Uncheck

L4 Protocol Any TCP Any UDP Any

Port ID 1 (1~10,0:don't care)

Current List

Binding

MAC Address 00:11:22:33:44:55

IP Address 0.0.0.0

Port ID 1 (1~10)

QoS VoIP

Priority#	7	
PortID#	Value (Hex,0~1F)	Mask (Hex,0~1F)
	0	0
Protocol#	Value (Hex,0~FF)	Mask (Hex,0~FF)
	0	0
Source Port#	Value (Hex,0~FFFF)	Mask (Hex,0~FFFF)
	0	0
Destination Port#	Value (Hex,0~FFFF)	Mask (Hex,0~FFFF)
	0	0

- MAC Address
- IP Address
- Port ID (1 ~ 10)

If the checkbox of QoS VoIP is selected, the following information should be provided.

Access Control List

Group Id: 1 (1~200)

Action: Permit **QoS VoIP** (QoS mode "All High Before Low" is required in QoS webpage)

VLAN: Any VID 1 (1~4094; Any means Vid=0 if uses binding)

Packet Type / Binding: IPv4 Non-IPv4 Binding

Src IP Address: Any IP 0.0.0.0 Mask 255.255.255.255

Dst IP Address: Any IP 0.0.0.0 Mask 255.255.255.255

IP Fragment: Uncheck

L4 Protocol: Any Protocol#: TCP Any Port#: UDP Any Port#:

Port Id: 1 (1~10, 0: don't care)

Current List:

QoS VoIP

Priority#	7	
PortID#	Value (Hex, 0~1F) 0	Mask (Hex, 0~1F) 0
Protocol#	Value (Hex, 0~FF) 0	Mask (Hex, 0~FF) 0
Source Port#	Value (Hex, 0~FFFF) 0	Mask (Hex, 0~FFFF) 0
Destination Port#	Value (Hex, 0~FFFF) 0	Mask (Hex, 0~FFFF) 0

QoS VoIP:

QoS VoIP	Priority#	7	
	PortID#	Value (Hex, 0~1F) 0	Mask (Hex, 0~1F) 0
	Protocol#	Value (Hex, 0~FF) 0	Mask (Hex, 0~FF) 0
	Source Port#	Value (Hex, 0~FFFF) 0	Mask (Hex, 0~FFFF) 0
	Destination Port#	Value (Hex, 0~FFFF) 0	Mask (Hex, 0~FFFF) 0

- Priority
 - The priority of QoS VoIP
 - Options: 0 ~ 7
- Port ID
 - Value
 - Mask
- Protocol
 - Value
 - Mask
- Source Port
 - Value
 - Mask
- Destination Port
 - Value
 - Mask

Note: all values are in HEX format.

3.4 Security



“Security” section allows users to enhance the security level of this MINI IP DSLAM. It includes the following functions:

- Security Manager
- MAC Limit
- 802.1x Configuration

3.4.1 Security Manager




“Security Manager” allows users to change the user name and password for login purpose. Only one set of user name and password is stored in the Switch. The followings are the necessary information for this section.

- User Name
- Assign/Change Password
- Reconfirm Password


Note: the default user name and password are “admin” and “admin”.

3.4.2 MAC Limit

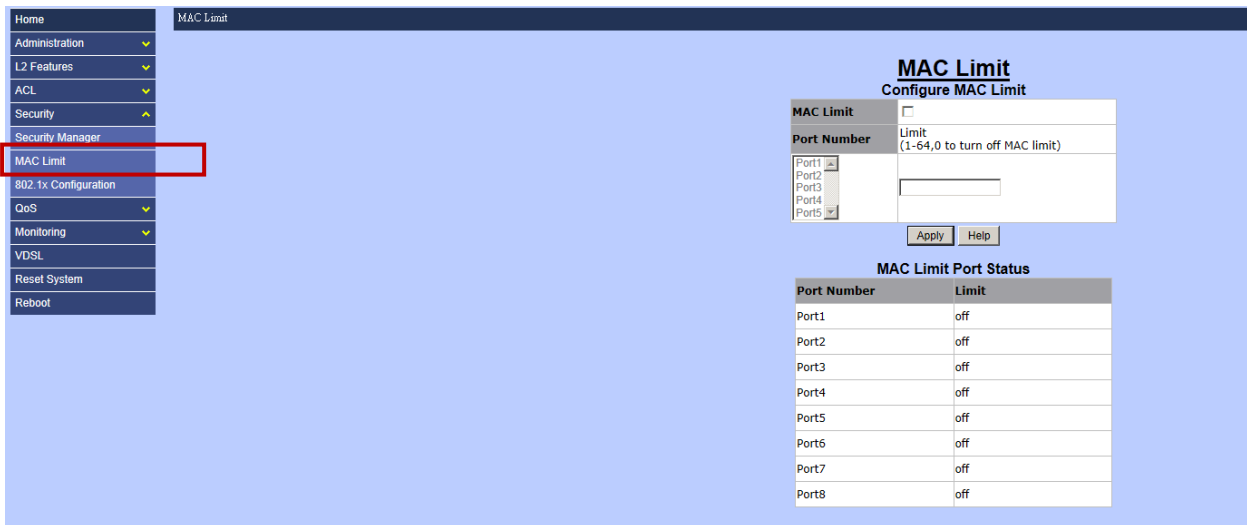

MAC limit allows users to set a maximum number of MAC addresses to be stored in the MAC address table. The MAC addresses chosen to be stored in MAC address table is the result of first-come-first-save policy. Once a MAC address is stored in the MAC address table, it stays in until it is aged out. When an “opening” is available, the switch stored the first new MAC address it sees in that opening. All packets from MAC addresses not in the MAC address table should be blocked. Two sections are in MAC Limit page:

- Configure MAC Limit

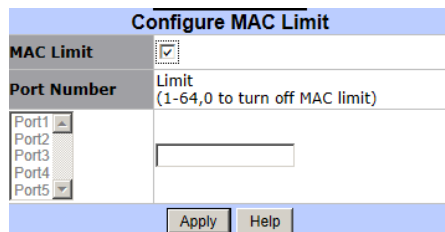

Users are able to setup MAC limit rules for each port in this section by providing the information as the followings:


- MAC Limit: enable or disable MAC limit function.
- Limit: the maximum number of MAC addresses should be blocked.

- MAC Limit Port Status

MAC Limit Port Status	
Port Number	Limit
Port1	off
Port2	off
Port3	off
Port4	off
Port5	off
Port6	off
Port7	off
Port8	off

- This section allows users to review the status of ports and MAC limits.

3.4.3 802.1x Configuration

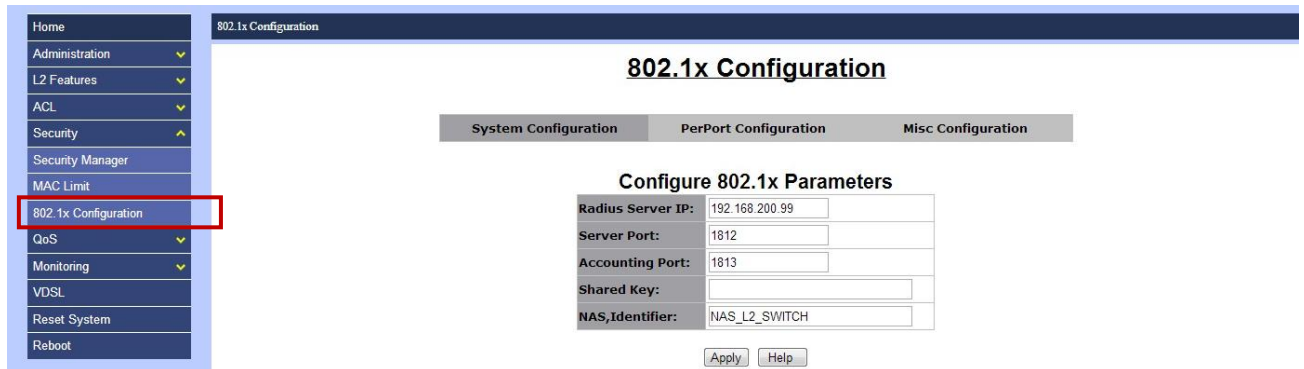

802.1x makes use of the physical access characteristics of IEEE 802 LAN infrastructures in order to provide a means of authenticating and authorizing devices attached to a LAN port that has point-to-point connection characteristics, and of preventing access to that port in cases in which the authentication and authorization process fails.

Note: The default 802.1x setup is disabled, hence, users will not be able to see “802.1x Configuration” page as showed above. To enable 802.1x, go to “Administration → Switch setting → Misc Configs” page to enable the 802.1x protocol field. After enable the function, the 802.1x configuration page will be shown up.

Three sections are in 802.1x configuration function:

- System Configuration

- Radius Server IP: the IP address of the authentication server.
- Server Port: the UDP port number used by the authentication server to authenticate (default: 1812).
- Accounting Port: the UDP port number used by the authentication server to retrieve accounting information (default: 1813).
- Shared Key: the password between the switch and the authentication server.
- NAS, Identifier: the name of this switch.

- PerPort Configuration

802.1x Configuration

System Configuration **Port Configuration** Misc Configuration

Configure 802.1x Per Port State

Port Number	Port State
Port1	Au
Port2	
Port3	
Port4	
Port5	

Apply Help

Port Status

PortNum	State
Port1	No
Port2	No
Port3	No
Port4	No
Port5	No
Port6	No
Port7	No
Port8	No
Port9	No
Port10	No
Port11	No
Port12	No
Port13	No

“PerPort Configuration” allows users to setup the authorization mode of 802.1x for each port and review the authorization status of each port.

The MINI IP DSLAM allows users to setup four authorization modes:

- FU: force the specific port to be unauthorized.
- FA: force the specific port to be authorized.
- AU: the state of the selected port was determined by the outcome of the authentication.
- NO: the selected port didn’t support 802.1x function.

- Misc Configuration

802.1x Configuration

System Configuration PerPort Configuration **Misc Configuration**

Configure 802.1x misc configuration

Quiet period:	60
Tx period:	15
Supplicant timeout:	30
Server timeout:	30
Max requests:	2
Reauth period:	3600

Apply Help

“Misc Configuration” page allows users to change miscellaneous setups of 802.1x function.

- Quiet Period: Used to define periods of time during which it will not attempt to acquire a supplicant (default time: 60 seconds).
- Tx Period: Used to determine when an EAPOL PDU is to be transmitted (Default value is 30)

seconds).

- Supplicant Timeout: Used to determine timeout conditions in the exchanges between the supplicant and authentication server (default value: 30 seconds).
- Server Timeout: Used to determine timeout conditions in the exchanges between the authenticator and authentication server (default value: 30 seconds).
- ReAuthMax: Used to determine the number of re-authentication attempts that are permitted before the specific port becomes unauthorized (default value: 2 times).
- Reauth Period: Used to determine a nonzero number of seconds between periodic re-authentication of the supplications (default value: 3600 seconds).

3.5 QoS



This switch provides quality of service (QoS) to prioritize the packet forwarding when traffic congestion happens. This switch supports two QoS functions: port-based (4-level output queue) and 802.1p (8-level priority to 4-level queue mapping). In addition, Strict and weight Round Robin (WRR) QoS modes are supported.

3.5.1 QoS Configuration



“QoS Configuration” page includes two sections as the followings:

- QoS Configuration



Three QoS modes are supported in this switch:

- First Come First Service
 - The sequence of packets sent is depending on arrive orders. This mode can be regarded as QoS is disabled.
- All High before Low
 - The high priority packets sent before low priority packets.

- WRR
 - Weighted Round Robin. Select the preference given to packets in the switch's high-priority queue. These options represent the number of higher priority packets sent before one lower priority packet is sent.
 - For example, 8 Highest : 4 second-high means that the switch sends 8 highest-priority packets before sending 4 second-high priority packets.



- 802.1p priority
 - The switch supports 802.1p priority queues with 4 priority levels (Highest, Second-High, Second-Low, and Lowest). This section is for setting up the maps of priority queues and priority levels.

- PerPort Configuration

QOS Configuration

Qos Configuration

PerPort Configuration

Configure Port Priority

Port Number	Port Priority
Port1 ▲	Disable ▼
Port2 ▲	
Port3 ▲	
Port4 ▼	
Port5 ▼	


Port Priority

PortNum	Priority
Port1	Disable
Port2	Disable
Port3	Disable
Port4	Disable
Port5	Disable
Port6	Disable
Port7	Disable
Port8	Disable
Mod1	Disable
Mod2	Disable


“PerPort Configuration” section allows users to setup the priority level for each port. Users are able to setup QoS algorithm with Port-Based algorithm in this page.

- Port Priority:
 - Options: Disable, 0 ~ 7.

3.5.2 ToS/DSCP

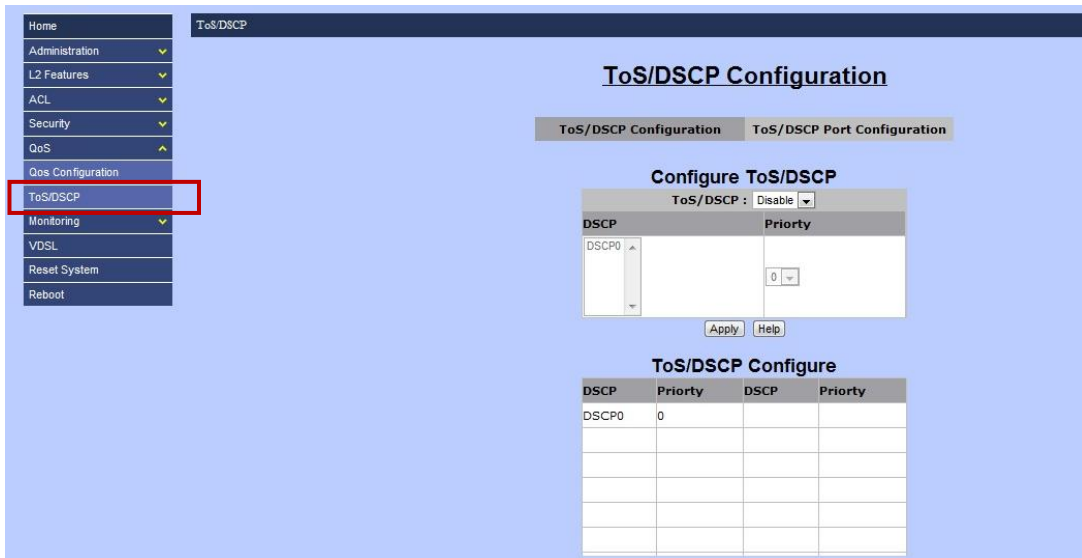

“ToS/DSCP” page is where users can set up priority algorithm for each queue and packets. In IPv4 packet header, there is a ToS byte. “ToS” stands for “Type of Service”, and ToS algorithm uses first 3 bits for priority level. However, for DSCP algorithm, it will take first 6 bits for priority level.

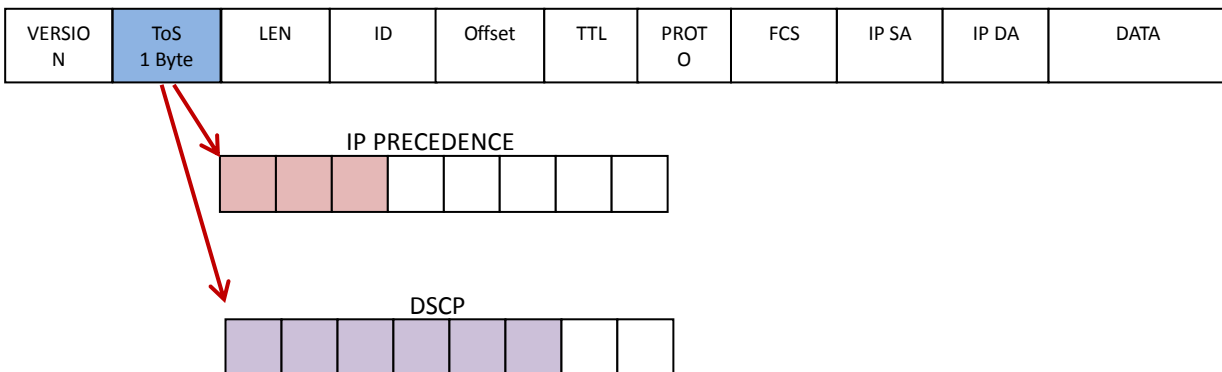

3.6 Monitoring

Home
Administration
L2 Features
ACL
Security
QoS
Monitoring
Port Status
Port Statistics
VDSL
Reset System
Reboot

“Monitoring” function is for users to review current status and statistics of each port (Port1 ~ Port8, Mod1 and Mod2).

3.6.1 Port Status

Port	State	Link	Negotiation	Speed	Duplex	Flow Control	Rate Control (Unit:128Kbps)		Security	BSF	Jumbo Frame
							Ingress	Egress			
Mod1	On	Up	Auto	1000	Full	On	Off	Off	Off	On	On
Mod2	On	Down	---	---	---	---	Off	Off	Off	On	On

“Port Status” displays current status of linked ports. This page is for review only. The information will be showed are as the followings.

Item	Data
Port	Port No.
State	On (Only linked port will be showed)
Link	Up / Down
Negotiation	Auto / Force
Speed	10 / 100 Mbps (Port1 ~ Port24) 10 / 100 / 1000 Mbps (Mod1 ~ Mod2)
Duplex	Full / Half
Rate Control (both Ingress and Egress)	On / Off
Security	On / Off
BSF	On / Off
Jumbo Frame	On / Off

3.6.2 Port Statistics

“Port Statistics” allows users to review the statistics data of each port with the following details.


Item	Data
Port	Port No
State	On / Down
Link	On / Down
TxGoodPkt	The total bytes of good packets which were transmitted
TxBadPkt	The total bytes of bad packets which were transmitted
RxGoodPkt	The total bytes of good packets which were received
RxBadPkt	The total bytes of bad packets which were received
TxAbort	The total bytes of packets which were aborted.
Collision	Collision
DropPkt	The total bytes of packets dropped

Port Statistics

The following information provides a view of the current status of the unit.

Port	State	Link	TxGoodPkt	TxBadPkt	RxGoodPkt	RxBadPkt	TxAbort	Collision	DropPkt
Port1	On	Down	122832	0	0	0	0	0	0
Port2	On	Down	122832	0	0	0	0	0	0
Port3	On	Down	122832	0	0	0	0	0	0
Port4	On	Down	122832	0	0	0	0	0	0
Port5	On	Down	122832	0	0	0	0	0	0
Port6	On	Down	122832	0	0	0	0	0	0
Port7	On	Down	122832	0	0	0	0	0	0
Port8	On	Down	122831	0	0	0	0	0	0
Mod1	On	Up	25826	0	259218	0	0	0	4278
Mod2	On	Down	0	0	0	0	0	0	0


3.7 VDSL



“VDSL” page is where users are able to setup and review VDSL profiles. Two sections are included in VDSL page:

- Configuration
- Profile Table

3.7.1 Configuration

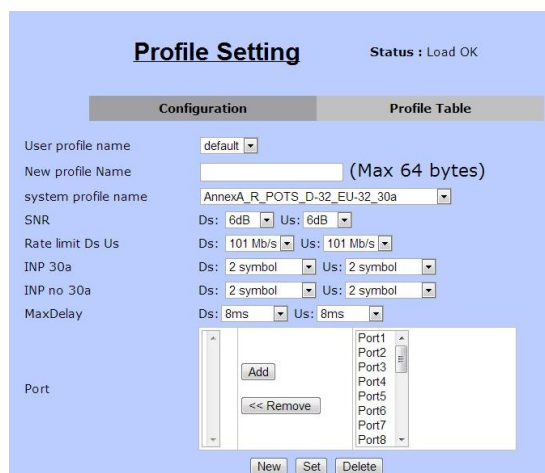

“Configuration” is where users set up VDSL profiles and store these profiles into the system. The followings are the details of each VDSL profile users can set up.

Item	Description
User Profile Name	The name of user-defined profile. Note: There are 21 pre-defined profiles. These names are not changeable. Users are allowed to save new profiles with “New” button.
New Profile Name	New profile name (up to 64 chars)
System Profile Name	This option is for setting up VDSL band profile. Different profile results in different connection status of data rate and distance. <ol style="list-style-type: none"> AnnexA_R_POTS_D-64_EU-64_30a AnnexA_R_POTS_D-32_EU-32_17a AnnexA_R_POTS_D-32_EU-32_12b AnnexA_R_POTS_D-32_EU-32_12a AnnexA_R_POTS_D-32_EU-32_8a AnnexA_R_POTS_D-32_EU-32_8b

	<ol style="list-style-type: none"> 7. AnnexA_R_POTS_D-32_EU-32_8c 8. AnnexA_R_POTS_D-32_EU-32_8d 9. AnnexA_R_POTS_D-32_EU-64_30a_NUS0 10. AnnexA_R_POTS_D-32_EU-64_17a 11. AnnexB_B7-1_997-M1c-A-7 12. AnnexB_B7-2_997-M1x-M-8 13. AnnexB_B7-3_997-M1x-M 14. AnnexB_B7-4_997-M2x-M-8 15. AnnexB_B7-5_997-M2x-A 16. AnnexB_B7-6_997-M2x-M 17. AnnexB_B7-9_997E17-M2x-A 18. AnnexB_B7-10_997E30-M2x-NUS0 19. AnnexB_B8-1_998-M1x-A 20. AnnexB_B8-1_998-M1x-B 21. AnnexB_B8-4_998-M2x-A 22. AnnexB_B8-5_998-M2x-M 23. AnnexB_B8-6_998-M2x-B 24. AnnexB_B8-8_998E17-M2x-NUS0 25. AnnexB_B8-9_998E17-M2x-NUS0-M 26. AnnexB_B8-10_998ADE17-M2x-NUS0-M 27. AnnexB_B8-11_998ADE17-M2x-A 28. AnnexB_B8-12_998ADE17-M2x-B 29. AnnexB_B8-13_998E30-M2x-NUS0 30. AnnexB_B8-14_998E30-M2x-NUS0-M 31. AnnexB_B8-15-998ADE30-M2x-NUS0-M 32. AnnexB_B8-16-998ADE30-M2x-NUS0-A 33. AnnexC_POTS_25-138_b 34. AnnexC_POTS_25-276_b 35. AnnexC_TCM_ISDN
SNR	SNR values for both downstream and upstream (6dB ~ 24dB)
Rate Limit Ds Us	The data rates for both downstream and upstream
INP 30a	INP levels for VDSL2 profile 30a for both downstream and upstream
INP no 30a	INP levels for other VDSL2 profiles (8a, 8b, 8c, 8d, 12a, 12b, and 17a) for both downstream and upstream
Max Delay	The maximum delay time for both downstream and upstream Options: No limit, No delay, 1ms ~ 63ms
Port	For assigning which ports should be applied the profile to.

3.7.2 Profile Table

Profile Setting													Status : Load OK
Configuration						Profile Table							
User Name	System Name	SNR(0.1 DB)		Rate Limit (kbps)		INP 30a (symbol)		INP Other (symbol)		Max Delay (ms)		Port	
		Ds	Us	Ds	Us	Ds	Us	Ds	Us	Ds	Us		
default	AnnexA_R_POTS_D-32_EU-32_30a	60	60	101000	101000	2	2	2	2	8	8	1,2,3,4,5,6,7,8	

“Profile Table” is for users to review the details of existing profiles in the following details.

User Name	The profile name
System Name	VDSL2 Band profile
SNR (Ds / Us)	SNR value
Rate Limit (Ds / Us)	The data rate
INP 30a (Ds / Us)	INP level for VDSL2 profile 30a
INP Other (Ds / Us)	INP level for the other VDSL2 profiles
Max Delay	Maximum delay
Port	The port members of this profile

3.8 Reset System



“Reset System” is for restoring all configurations back to the default factory configurations. All the settings will be changed back to the original state.

3.9 Reboot




“Reboot” allows users to reboot the switch without turning off the power.

Chapter 4 Configuration via Console

The MINI IP DSLAM support Command Line Interface for users to access the switch without opening any web browser. It is easily accessible for users with any terminal emulation program, such as, Hyperterminal, or teraterm, etc.


The default setting of the serial port to connect to the switch is as the following.

Baud Rate	115200
Data Bit	8
Parity	None
Stop Bit	1
Flow Control	None

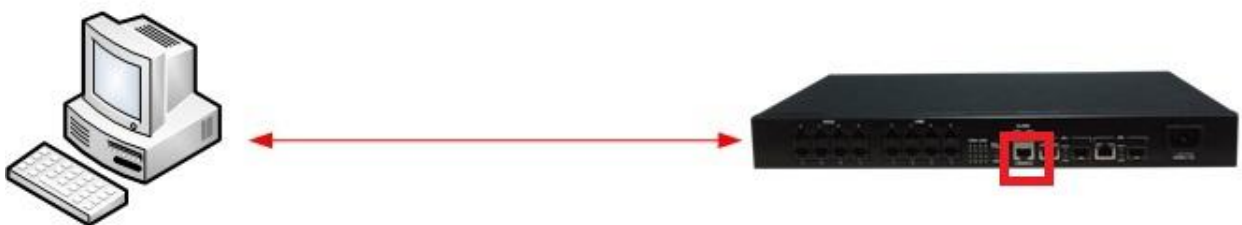

4.1 Login into the Console

After connecting the switch with PC or laptop together, users are able to login with a terminal emulation program, such as, Hyperterminal, etc. Users should be able to see the following image while the switch is booting.

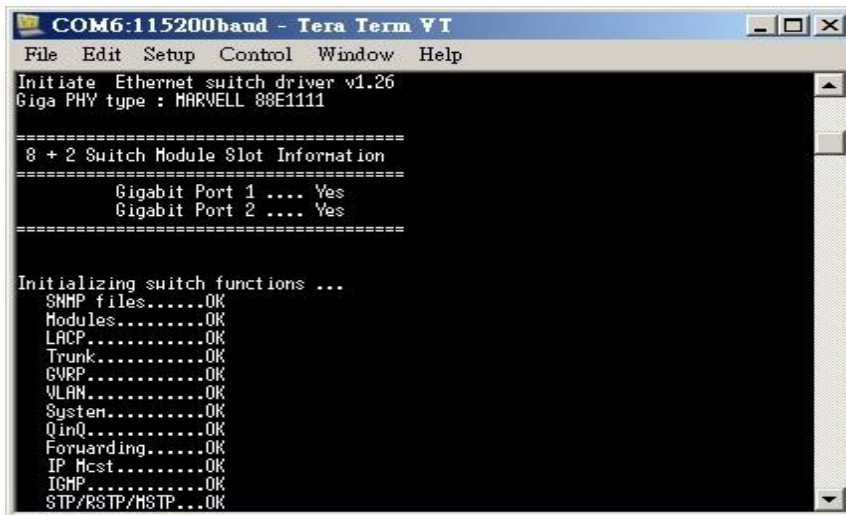


```
COM6:115200baud - Tera Term VT
File Edit Setup Control Window Help
Initiate Ethernet switch driver v1.26
Giga PHY type : MARVELL 88E1111

=====
8 + 2 Switch Module Slot Information
=====
Gigabit Port 1 .... Yes
Gigabit Port 2 .... Yes
=====

Initializing switch functions ...
SNMP files.....OK
Modules.....OK
LACP.....OK
Trunk.....OK
GVRP.....OK
VLAN.....OK
System.....OK
QinQ.....OK
Forwarding.....OK
IP Mcast.....OK
IGMP.....OK
STP/RSTP/MSTP...OK
```

When the booting process is completed, users will notice a login request as the following image.

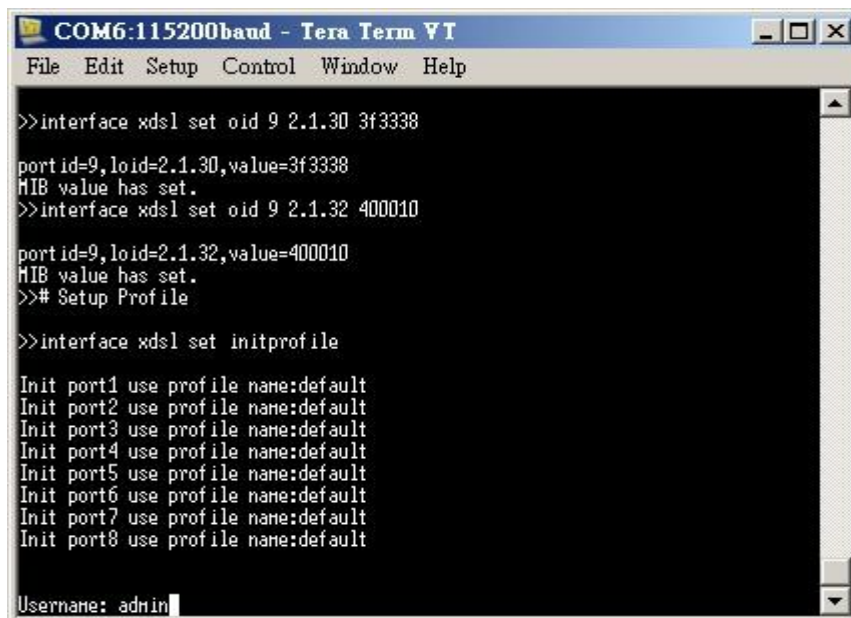

```
COM6:115200baud - Tera Term VT
File Edit Setup Control Window Help

>>interface xdsl set oid 9 2.1.30 3f3338
port id=9,loid=2.1.30,value=3f3338
MIB value has set.
>>interface xdsl set oid 9 2.1.32 400010
port id=9,loid=2.1.32,value=400010
MIB value has set.
>># Setup Profile

>>interface xdsl set initprofile
Init port1 use profile name:default
Init port2 use profile name:default
Init port3 use profile name:default
Init port4 use profile name:default
Init port5 use profile name:default
Init port6 use profile name:default
Init port7 use profile name:default
Init port8 use profile name:default
Username: admin
```

The default user name and password are “admin” and “admin”. Once the correct user name and password are provided, users should be able to login in and see “Switch#” showed.

4.2 General Information of Commands

Users are able to review help information with “?” command.

```

COM6:115200baud - Tera Term VT
File Edit Setup Control Window Help
Init port1 use profile name:default
Init port2 use profile name:default
Init port3 use profile name:default
Init port4 use profile name:default
Init port5 use profile name:default
Init port6 use profile name:default
Init port7 use profile name:default
Init port8 use profile name:default

Username: admin
Password:
Switch#
  exit      Exit current node and down to previous node
  logout    Log out of the system
  help      Description of the interactive help system
  history   Set the number of history commands
  no        Negate a command or set its defaults
  show      Show running system information
  hostname  Set system's network name
  configure Configuration
  disable   Turn off privileged mode command
Switch#

```

Nine major commands are provided in the root mode.

exit	Exit current mode and move to previous mode
logout	Log out the system
help	Show the description of a command
history	Set the number of history commands
no	Negate a command or set its defaults
show	Show information
configure	Configuration
disable	Turn off privileged mode command
	- This will turn off the privilege of setting out system configurations.
	- “enable” will be showed if user disables the privilege

4.3 Configuration

```

COM6:115200baud - Tera Term VT
File Edit Setup Control Window Help
Init port1 use profile name:default
Init port2 use profile name:default
Init port3 use profile name:default
Init port4 use profile name:default
Init port5 use profile name:default
Init port6 use profile name:default
Init port7 use profile name:default
Init port8 use profile name:default

Username: admin
Password:
Switch#
exit      Exit current mode and down to previous mode
logout    Log out of the system
help      Description of the interactive help system
history   Set the number of history commands
no        Negate a command or set its defaults
show      Show running system information
hostname  Set system's network name
configure Configuration
disable   Turn off privileged mode command
Switch# exit
Switch>

```

In order to go to configuration mode, users should key in “config” in “Switch#” and enter. Then, users are able to configure the settings of MINI IP DSLAM.

The followings are the available configurations of the switch.

exit	Exit current mode and change to the previous mode
logout	Log out the system
help	Show the description of a command
history	Set the number of history commands
no	Negate a command or set its defaults
show	Show running system information
hostname	Set up the switch's network name
disable	Turn off privileged mode (disable configuration mode)
password	Password information
timeout	Set up the timeout for the current CLI
syslog-server	Set up the information of syslog server
broadcast	Set up Broadcast storm filter mode
collision-retry	Set up the settings of collision-retry function
mac-age-time	Enable MAC address age-out function
mac-hash	Set up MAC hash algorithm
mirror-port	Port monitoring information
qos	QoS information
tosport	ToS/DSCP port status information

tosdscp	ToS/DSCP information
clear	Clear values in destination protocol
mac-address-table	MAC address table information
smac-address-table	MAC address table information
filter	Filter destination MAC address information
mac-limit	MAC limit
port	Port information
boot	Reboot the switch
copy	Copy configurations
dhcp	DHCP information
erase	Erase configuration
ip	IP information
ping	Send ICMP ECHO_REQUEST to network hosts
dhcp-option82	Enable DHCP option 82 feature
dhcp-relay	Enable DHCP relay feature
qinq	QinQ information
trunk	Trunking information
vlan	VLAN information
dot1x	802.1x information
radius-server	Radius server information
garp	GARP information
gvrp	GVRP information
igmp	IGMP information
lACP	LACP information
snmp	SNMP information
sntp	Start SNTP service
spanning-tree	Spanning Tree Protocol
acl	ACL information
enable	Enable privileged command mode
bind	Enable SIP/SMAC binding
dslcli	Run DSL CLI
interface	Commands for interfaces
profiles	Commands for profiles
util	Commands for VDSL utility

4.4 Command Descriptions

4.4.1 System Commands

show running-config

Show the running configuration of the switch.

copy running-config startup-config

Backup the configurations of the switch.

erase startup-config

Reset to default factory configurations at the following boot time.

clear arp [ip-address]

Clear entries in the ARP cache in the selected IP address.

show arp

Show IP ARP translation table.

ping ip-addr [<1...999>]

Send ICMP ECHO_REQUEST to the selected IP address.

<1...999>: the number of repetitions. If there is no value in this area, it will continuously ping until users press <Ctrl>+C to stop.

no per-vlan-flooding-portmask

Enable or disable per VLAN default flooding port mask.

per-vlan-flooding-portmask <unicast | multicast> <vlan-id> <port-list>

Set unicast or multicast per VLAN default flooding port mask.

show per-vlan-flooding-portmask

Display unicast and multicast per VLAN default flooding port mask table.

4.4.2 Switch Static Configuration

port state <on | off> [<port-list>]

Turn on or turn off the port state.

<port-list>: specifies the ports to be turn on or off. If no <port-list> value, all ports will be turn on or turn off.

port nego <force | auto > [<port-list>]

Set port negotiation mode.

<port-list>: specifies the ports to be set. If no value, all port will be set.

port speed <10 | 100 | 1000> <full | half> [<port-list>]

Set port speed (mbps) and duplex.

<port-list>: specifies the ports to be set. If no value, all port will be set.

port flow <enable | disable> <enable | disable> [<port-list>]

Enable or disable port flow control.

1st <enable | disable>: enables or disables flow control in full duplex mode.

2nd <enable | disable>: enables or disables flow control in half duplex mode.

<port-list>: specifies the ports to be set. If not entered, all ports are set.

port rate <ingress | egress> <0..8000> [<port-list>]

Set port effective ingress or egress rate.

<0..8000>: specifies the ingress or egress rate. (0..8000)

<port-list>: specifies the ports to be set. If not entered, all ports are set.

port security <on | off> [<port-list>]

Set port priority. When port security is on, the port will stop MAC address learning, and forward only packets with MAC address in the static MAC address table.

<port-list> specifies the ports to be set. If not entered, all ports are set.

port protected group <1-2> <port-list>

Set protected port group member.

<port-list> specifies the group member ports.

port protected <port-list>

Set protected port list.

<port-list> specifies the protected port list.

port priority <disable | low | high> [<port-list>]

Set port priority.

<port-list> specifies the ports to be set. If not entered, all ports are set.

port jumboframe <enable | disable> [<port-list>]

Set port jumbo frame. When port jumbo frame is enable, the port forward jumbo frame packet

<port-list> specifies the ports to be set. If not entered, all ports are set.

port interval <0-3600>:

While flooding CPU port at the speed of 4MB/s or larger, system will close relative port.

And system will open this port using this interval value.0 represents system will never enable this after close it for flooding CPU.

show port status

Show port status, including port State, Link, Trunking,VLAN,Negotiation,Speed,Duplex,Flow control, Rate control ,Priority,Security,BSF control.

show port statistics <port-id>

Show port statistics, including TxGoodPkt, TxBadPkt, RxGoodPkt, RxBadPkt,TxAbort, Collision, and DropPkt.

<port-id> specifies the port to be shown.

show port protection

Show protected port information.

4.4.3 Trunk Commands

show trunk

Show trunking information.

trunk add <trunk-id> <lacp | no-lacp> <port-list> <active-port-list>

Add a new trunk group.

<trunk-id> specifies the trunk group to be added.

<lacp> specifies the added trunk group to be LACP enabled.

<no-lacp> specifies the added trunk group to be LACP disabled.

<port-list> specifies the ports to be set.

<active-port-list> specifies the ports to be set to LACP active.

no trunk <trunk-id>

Delete an existing trunk group.

<trunk-id> specifies the trunk group to be deleted.

4.4.4 LACP Commands

[no] lacp

Enable/disable LACP.

lacp system-priority <1..65535>

Set LACP system priority.

Parameters:

<1..65535> specifies the LACP system priority.

no lacp system-priority

Set LACP system priority to the default value 32768.

show lacp status

Show LACP enable/disable status and system priority.

show lacp

Show LACP information.

show lacp agg <trunk-id>

Show LACP aggregator information.

<trunk-id> specifies the trunk group to be shown.

show lacp port <port-id>

Show LACP information by port.

<port-id> specifies the port to be shown.

NOTE: If VLAN group exist, all of the members of static trunk group must be in same VLAN group.

4.4.5 VLAN Mode & Commands

- **VLAN Mode: Port based**

Packets can go among only members of the same VLAN group. Note all unselected ports are treated as belonging to another single VLAN. If the port-based VLAN enabled, the VLAN-tagging is ignored.

- **VLAN Mode: 802.1Q**

If a trunk group exists, you can see it (e.g. TRUNK1, TRUNK2...) after port 8. And, you can configure it to be a member of the VLAN group. In the setting, port was set to Untagged if devices underneath this port do not support VLAN-tagging. Thus the switch can send untagged frames to this port. Consequently, device that do not support VLAN-tagging or do not enable VLAN tagging could successfully fetch the incoming frames and could communicate with device that transfers tagged frames, and vice versa.

- **Advanced 802.1Q VLAN Setting**

Ingress filters configuration when a packet was received on a port, you can govern the switch to drop it or not if it is an untagged packet. Furthermore, if the received packet is tagged but not belonging to the same VLAN group of the receiving port, you can also control the switch to forward or drop the packet. The example below configures the switch to drop the packets not belonging to the same VLAN group and forward the packets not containing VLAN tags.

show vlan mode

Display the current VLAN mode.

vlan mode (disabled|port-based|dot1q)

Change VLAN mode.

(disabled|port-based|dot1q) specifies the VLAN mode.

NOTE: Change the VLAN mode for every time, user have to restart the switch for valid value.

show vlan mode

Display the current VLAN mode.

vlan mode (disabled | port-based | dot1q)

Change VLAN mode.

Parameters:

(disabled | port-based | dot1q) specifies the VLAN mode.

NOTE: Change the VLAN mode for every time, user have to restart the switch for valid value.

vlan add <1-4094> <NAME> <cpu-port | no-cpu-port> <LIST> [<LIST>]

Add or edit VLAN entry.

<1-4094> specifies the VLAN id or Group id (if port based VLAN mode)

<NAME> specifies the VLAN group name.

<cpu-port | no-cpu-port> specifies the CPU port belong this VLAN group.

1st <LIST> specifies the ports to be set to VLAN members.

2nd [<LIST>] specifies the ports to be set to tagged members. If not entered, all members set to untagged.

e.g. vlan add 1 vlan1 cpu-port 1-4 . This VLAN entry has four members (from port1 to port4) and all members are untagged.

no vlan <1-4094>

Delete VLAN entry.

Parameters:

<1-4094> specifies the VLAN id or group id (if port based VLAN). e.g. no vlan 1

show vlan [<1-4094>]

Show VLAN entry information.

[<1-4094>] specifies the VLAN id, null means all valid entries. e.g. show vlan 1

show vlan static

Show static VLAN entry information.

vlan pvid <LIST> <1-4094>

Set port default VLAN id.

<LIST> specifies the ports to be set.

<1-4094> specifies the port VLAN id.

show vlan pvid [<LIST>]

Show port default VLAN id.

Parameters:

[<LIST>] specifies the ports to be showed. If not entered, all port's PVID will be showed.

vlan filter <enable | disable> <enable | disable> <LIST>

Set ingress filter rules.

1st <enable | disable> specifies the non-members packet will be forwarded or not. If set enable, forward only packets with VID matching this port's configured VID.

2nd <enable | disable> specifies the untagged frame will be dropped or not. If set enable, drop untagged frame.

<LIST> specifies the port or trunk list (eg. 3, 6-8, Trk2)

show vlan filter [<LIST>]

Show VLAN filter setting.

[<LIST>] specifies the ports to be showed. If not entered, all ports' filter rules will be showed.

4.4.6 GVRP Commands

[no] gvrp

Enable or disable GVRP.

show gvrp status

Show GVRP enable or disable status.

[no] port gvrp <LIST>

Enable or disable GVRP by port.

<LIST> specifies the port or trunk list to be set.

show port gvrp

Show GVRP status by port.

garp timer <join | leave | leave-all> <0..65535>

Set GARP timer.

<join | leave | leave-all> specifies a timer (Join, Leave, or Leave-All) to be set

<0..65535> specifies the timer in seconds.

show garp timer

Show GARP timer.

show gvrp db

Show GVRP DB.

show gvrp gip

Show GVRP GIP.

show gvrp machine

Show GVRP machine.

clear gvrp statistics <LIST>

Clear GVRP statistics by port.

<LIST> specifies the port or trunk list to be set

show gvrp statistics <LIST>

Show GVRP statistics by port.

<LIST> specifies the port or trunk list to be set

4.4.7 QinQ Commands

qinq enable

Enable QinQ.

[no] qinq

Disable QinQ.

qinq tpid <TPIDVAL>

Set QinQ tpid.

<TPIDVAL> specifies QinQ tpid value (Hex, 1~FFFF)

qinq userport <enable | disable> <LIST>

A port configured to support client end of QinQ tunnel is called a QinQ user-port. Use this command to enable/disable QinQ user port to specified port(s).

qinq uplinkport <enable | disable> <LIST>

A port configured to support network end of QinQ tunnel is called a QinQ uplink-port. Use this command to enable/disable QinQ uplinkport to specified port(s).

qinq tunnel add <1-9> <1-4094> <LIST>

Add QINQ tunnel.

<1-9> specifies the tunnel ID

<1-4094> specifies the VLAN ID

<LIST> specifies the ports to be set to QINQ tunnel.

qinq tunnel delete <1-9>

Delete QinQ tunnel.

<1-9> specifies the tunnel ID

show qinq configuration

Show QinQ global and portal configuration

show qinq tunnel

Show QinQ tunnel information

4.4.8 Misc Configuration

[no] mac-age-time

Enable or disable MAC address age-out.

mac-age-time <6..1572858>

Set MAC address age-out time.

<6..1572858> specifies the MAC address age-out time. The value must be divisible by 6.

Type the number of seconds that an inactive MAC address remains in the switch's address table

show mac-age-time

Show MAC address age-out time

broadcast mode <off | 1/2 | 1/4 | 1/8 | 1/16>

Set broadcast storm filter mode to off, 1/2, 1/4, 1/8, 1/16

broadcast select <unicast/multicast | control packet | ip multicast | broadcast>

Select the Broadcast storm filter packet type:

- Unicast/Multicast: Flood unicast/multicast filter
- Control Packets: Control packets filter
- IP multicast: Ip multicast packets filter
- Broadcast Packets: Broadcast Packets filter

Collision-Retry <off | 16 | 32 | 48>

Parameters:

<off|16|32|48> In half duplex, collision-retry maximum is 16, 32 or 48 times and packet will be dropped if collisions still happen. In default (off), if collision happens, it will retry forever.

Hash <crc-hash | direct-map>

Set hash algorithm to CRC-Hash or DirectMap.

4.4.9 Administration

hostname <name-str>

Set switch name.

<name-str> specifies the switch name. If you would like to have spaces within the name, use quotes ("") around the name.

no hostname: Reset the switch name to factory default setting.

[no] password <manager | operator | all>

Set or remove username and password for manager or operator. The manager username and password is also used by the web UI.

ip address <ip-addr> <ip-mask>

Set IP address and subnet mask.

ip default-gateway <ip-addr>

Set the default gateway IP address.

show ip

Show IP address, subnet mask, and the default gateway.

show info

Show basic information, including system info, MAC address, and firmware version.

dhcp

Set switch as dhcp client, it can get ip from dhcp server

NOTE: If this command is set, the switch will reboot.

show dhcp

show dhcp enable/disable

4.4.10 Port Mirroring

Port monitoring is a feature to redirect the traffic occurred on every port to a designated monitoring port on the switch. With this feature, the network administrator can monitor and analyze the traffic on the entire LAN segment. In the switch, you can specify one port to be the monitoring port and any single port to be the monitored port. You also can specify the direction of the traffic that you want to monitor. After properly configured, packets with the specified direction from the monitored ports are forwarded to the monitoring port.

NOTES:

1. The default Port Monitoring setting is disabled.
2. The analysis port is dedicated as mirroring port with duplicated traffic flow from mirrored port. The ordinary network traffic is not available for the analysis port.
3. Any trunk group and member port is not available for this function

mirror-port <rx | tx | both> <port-id> <port-list> Set port monitoring information. (RX only|TX only|both RX and TX)

rx specifies monitoring rx only.

tx specifies monitoring tx only.

both specifies monitoring both rx and tx.

<port-id> specifies the analysis port ID. This port receives traffic from all monitored ports.

<port-list> specifies the monitored port list.

show mirror-port

Show port monitoring information

4.4.11 QoS

● **QoS Mode:**

- **First Come First Service:** The sequence of packets sent is depending on arrive orders.
 - **All High before Low:** The high priority packets sent before low priority packets.
 - **WRR:** Weighted Round Robin. Select the preference given to packets in the switch's high-priority queue. These options represent the number of higher priority packets sent before one lower priority packet is sent. For example, 8 Highest : 4 second-high means that the switch sends 8 highest-priority packets before sending 4 second high priority packets.
- **Qos Level:** 0~7 priority level can map to highest, second-high, second-low, lowest queue.

**qos priority <first-come-first-service | all-high-before-low | weighted-round-robin>
<highest-weight>[<sechighweight>][<sec low -weight>] [<lowest-weight>]**

Set 802.1q priority.

e.g. qos priority weighted-round-robin 8,4,2,1

qos level < highest | second-high | second-low | lowest > <level-list>

Set priority levels to highest, second-high, second-low and lowest.

<level-list> specifies the priority levels to be high or low. Level must be between 1 and 7.

e.g. qos level highest 7

e.g. qos level lowest 4

show qos

Show QoS configurations, including 802.1p priority, priority level.

e.g. show qos

QoS configurations:

QoS mode: first come first service

Highest weight: 8

Second High weight: 4

Second Low weight: 2

Lowest weight: 1

802.1p priority [0-7]:

Lowest Lowest SecLow SecLow SecHigh SecHigh Highest Highest

- Per Port Priority

port priority <disable | [0-7]> [<port-list>]

Set port priority.

[<port-list>] specifies the ports to be set. If not entered, all ports are set.

e.g. port priority disable 1-5

4.4.12 Commands for MAC

clear mac-address-table

Clear all dynamic MAC address table entries.

mac-address-table static <mac-addr> <vlan-id> <port-id | port-list>

Set static unicast or multicast MAC address. If multicast MAC address (address beginning with 01:00:5E) is supplied, the last parameter must be port-list. Otherwise, it must be port-id.

no mac-address-table static <mac-addr> <vlan-id>

Delete static unicast or multicast MAC address table entries.

show mac-address-table

Display MAC address table entries.

show mac-address table static

Display static MAC address table entries.

show mac-address-table multicast

Display multicast related MAC address table.

smac-address-table static <mac-addr> <vlan-id> <port-id | port-list>

Set static unicast or multicast MAC address in secondary MAC address table. If multicast MAC address (address beginning with 01:00:5E) is supplied, the last parameter must be port-list. Otherwise, it must be port-id.

show smac-address-table

Display secondary MAC address table entries.

show smac-address-table multicast

Display multicast related secondary MAC address table.

[no] filter <mac-addr> <vlan-id>

Set MAC address filter. The packets will be filtered if both of the destination MAC address and the VLAN tag match the filter entry. If the packet does not have a VLAN tag, then it matches an entry with VLAN ID 1.

show filter

Display filter MAC address table.

4.4.13 MAC Limits

MAC limit allows users to set a maximum number of MAC addresses to be stored in the MAC address table. The MAC addresses chosen to be stored in MAC address table is the result of first-come-first-serve policy. Once a MAC address is stored in the MAC address table, it stays in until it is aged out. When an “opening” is available, the switch stored the first new MAC address it sees in that opening. All packets from MAC addresses not in the MAC address table should be blocked. User can configure the MAC limit setting and fill in the new value.

mac-limit

Enable MAC limit.

no mac-limit

Disable MAC limit.

Mac-limit <port-list> <1-64>

Set port MAC limit value, 0 to turn off MAC limit of port.

show mac-limit

Show MAC limit information, including MAC limit enable/disable, per-port MAC limit setting.

4.4.14 Protocol Related Commands

- **STP/RSTP**

[no] spanning-tree

Enable or disable spanning-tree.

spanning-tree forward-delay <4-30>

Set spanning tree forward delay used, in seconds.

<4-30> specifies the forward delay, in seconds. Default value is 15.

Note: The parameters must enforce the following relationships:

$2 * (\text{hello-time} + 1) \leq \text{maximum-age} \leq 2 * (\text{forward-delay} - 1)$

spanning-tree hello-time <1-10>

Set spanning tree hello time, in seconds.

<1-10> specifies the hello time, in seconds. Default value is 2.

Note: The parameters must enforce the following relationships:

$2 * (\text{hello-time} + 1) \leq \text{maximum-age} \leq 2 * (\text{forward-delay} - 1)$

spanning-tree maximum-age <6-40>

Set spanning tree maximum age, in seconds.

<6-40> specifies the maximum age, in seconds. Default value is 20.

Note: The parameters must enforce the following relationships:

$2 * (\text{hello-time} + 1) \leq \text{maximum-age} \leq 2 * (\text{forward-delay} - 1)$

spanning-tree priority <0-61440>

Set spanning tree bridge priority.

<0-61440> specifies the bridge priority. The value must be in steps of 4096.

spanning-tree port path-cost <1-200000000> [<port-list>]

Set spanning tree port path cost.

<1-200000000> specifies port path cost.

[<port-list>] specifies the ports to be set. Null means all ports.

spanning-tree port priority <0-240> [<port-list>]

Set spanning tree port priority.

<0-240> specifies the port priority. The value must be in steps of 16.

[<port-list>] specifies the ports to be set. Null means all ports.

show spanning-tree

Show spanning-tree information.

show spanning-tree port [<port-list>]

Show spanning tree per port information.

[<port-list>] specifies the port to be shown. Null means all ports.

The remaining commands in this section are only for system with RSTP (rapid spanning tree, 802.1w) capability:

spanning-tree protocol-version <stp | rstp>

Change spanning tree protocol version.

stp specifies the original spanning tree protocol (STP,802.1d).

rstp specifies rapid spanning tree protocol (RSTP,802.1w).

[no] spanning-tree port mcheck [<port-list>]

Force the port to transmit RST BPDUs. No format means not force the port to transmit RST BPDUs.

[<port-list>] specifies the ports to be set. Null means all ports.

[no] spanning-tree port edge-port [<port-list>]

Set the port to be edge connection. No format means set the port to be non-edge connection.

[<port-list>] specifies the ports to be set. Null means all ports.

[no] spanning-tree port non-stp [<port-list>]

Disable or enable spanning tree protocol on this port.

[<port-list>] specifies the ports to be set. Null means all ports.

spanning-tree port point-to-point-mac <auto | true | false> [<port-list>]

Set the port to be point to point connection.

auto specifies point to point link auto connection.

true specifies point to point link true.

false specifies point to point link false.

[<port-list>] specifies the ports to be set. Null means all ports.

- MSTP

[no] spanning-tree

Enable or disable multiple spanning tree.

spanning-tree forward-delay <4-30>

Set spanning tree forward delay of CIST, in seconds.

<4-30> specifies the forward delay, in seconds. Default value is 15.

Note: The parameters must enforce the following relationships:

$2 * (\text{hello-time} + 1) \leq \text{maximum-age} \leq 2 * (\text{forward-delay} - 1)$

spanning-tree hello-time <1-10>

Set spanning tree hello time of CIST, in seconds.

<1-10> specifies the hello time, in seconds. Default value is 2.

Note: The parameters must enforce the following relationships:

$2 * (\text{hello-time} + 1) \leq \text{maximum-age} \leq 2 * (\text{forward-delay} - 1)$

spanning-tree maximum-age <6-40>

Set spanning tree maximum age of CIST, in seconds.

<6-40> specifies the maximum age, in seconds. Default value is 20.

Note: The parameters must enforce the following relationships:

$2 * (\text{hello-time} + 1) \leq \text{maximum-age} \leq 2 * (\text{forward-delay} - 1)$

spanning-tree priority <0-61440>

Set spanning tree bridge priority of CIST and all MSTIs.

<0-61440> specifies the bridge priority. The value must be in steps of 4096. Default value is 32768.

spanning-tree protocol-version { stp | mstp }

Set spanning tree protocol version of CIST.

stp specifies the original spanning tree protocol (STP,802.1d).

mstp specifies the multiple spanning tree protocol (MSTP,802.1s).

spanning-tree max-hops <1-40>

Set spanning tree bridge maximum hops of CIST and all MSTIs.
<1-40> specifies the bridge maximum hops. Default value is 20.

spanning-tree name [<name-string>]

Set spanning tree bridge name of CIST.
[<name-string>] specifies the bridge name. Default name is null.

spanning-tree revision <1-65535>

Set spanning tree bridge revision of CIST.
<1-65535> specifies the bridge revision. Default value is 0.

spanning-tree port path-cost <1-200000000> [<port-list>]

Set spanning tree port path cost of CIST.
<1-200000000> specifies port path cost.
[<port-list>] specifies the ports to be set. Null means all ports.

spanning-tree port priority <0-240> [<port-list>]

Set spanning tree port priority of CIST.
<0-240> specifies the port priority. The value must be in steps of 16.
[<port-list>] specifies the ports to be set. Null means all ports.

[no] spanning-tree port mcheck [<port-list>]

Force the port of CIST to transmit MST BPDUs. No format means not force the port of CIST to transmit MST BPDUs.
[<port-list>] specifies the ports to be set. Null means all ports.

[no] spanning-tree port edge-port [<port-list>]

Set the port of CIST to be edge connection. No format means set the port of CIST to be non-edge connection.
[<port-list>] specifies the ports to be set. Null means all ports.

[no] spanning-tree port non-stp [<port-list>]

Disable or enable spanning tree protocol on the CIST port.
[<port-list>] specifies the ports to be set. Null means all ports.

spanning-tree port point-to-point-mac <auto | true | false> [<port-list>]

Set the port of CIST to be point to point connection.

auto specifies point to point link auto connection.

true specifies point to point link true.

false specifies point to point link false.

[<port-list>] specifies the ports to be set. Null means all ports.

spanning-tree mst <0-15> priority <0-61440>

Set spanning tree bridge priority of MSTI.

<0-15> specifies the MSTI instance ID.

<0-61440> specifies the MSTI bridge priority. The value must be in steps of 4096. Default value is 32768.

spanning-tree mst <0-15> vlan [<vlan-list>]

Set MSTI to map VLAN list.

<0-15> specifies the MSTI instance ID.

[<vlan-list>] specifies the mapped VLAN list. Null means all VLANs.

spanning-tree mst <0-15> port path-cost <1-200000000> [<port-list>]

Set spanning tree port path cost of MSTI.

<1-200000000> specifies port path cost.

[<port-list>] specifies the ports to be set. Null means all ports.

spanning-tree mst <0-15> port priority <0-240> [<port-list>]

Set spanning tree port priority of MSTI.

<0-240> specifies the port priority. The value must be in steps of 16.

[<port-list>] specifies the ports to be set. Null means all ports.

no spanning-tree mst <0-15>

Delete the specific MSTI.

<0-15> specifies the MSTI instance ID.

show spanning-tree

Show spanning-tree information of CIST.

show spanning-tree port [<port-list>]

Show spanning tree port information of CIST.

[<port-list>] specifies the port to be shown. Null means all ports.

show spanning-tree mst configuration

Show MST instance map.

show spanning-tree mst <0-15>

Show MST instance information.

<0-15> specifies the MSTI instance ID.

show spanning-tree mst <0-15> port <1-26>

Show specific port information of MST instance.

<0-15> specifies the MSTI instance ID.

<1-26> specifies port number.

show vlan spanning-tree

Show per VLAN per port spanning tree status.

4.4.15 SNMP

snmp /no snmp

Enable or disable SNMP.

show snmp status

Show enable or disable status of SNMP.

snmp system-name <name-str>

Set agent system name string.

<name-str> specifies the system name string.

e.g. snmp system-name SWITCH

snmp system-location <location-str>

Set agent location string.

<location-str> specifies the location string.

e.g. snmp system-location office

snmp system-contact <contact-str>

Set agent system contact string.

<contact-str> specifies the contact string.

e.g. snmp system-contact abc@sina.com

show snmp system

Show SNMP system information.

snmp community <read-sysinfo-only | read-all-only | read-write-all> <community-str>

Set SNMP community string.

<community-str> specifies the community string.

e.g. snmp community read-all-only public

no snmp community <community-str>

Delete SNMP community string.

<community-str> specifies the community string.

e.g. no snmp community public

show snmp community

Show SNMP community strings.

snmp trap <ip-addr> [<community-str>] [<1...65535>]

Set SNMP trap receiver IP address, community string, and port number.

<ip-addr> specifies the IP address.

<community-str> specifies the community string.

<1...65535> specifies the trap receiver port number.

e.g. snmp trap 192.168.200.1 public

no snmp trap <ip-addr> [<1...65535>]

Remove trap receiver IP address and port number.

<ip-addr> specifies the IP address.

<1...65535> specifies the trap receiver port number.

e.g. no snmp trap 192.168.200.1

show snmp trap

Show all trap receivers.

snmp group <group-name> <v1 | v2c | usm> <security-name>

Join a group.

<group-name> specifies the group name.

<v1 | v2c | usm> specifies the security model.

<security-name> specifies the security name.

e.g. snmp group test usm testuser

no snmp group <v1 | v2c | usm> <security-name>

Leave a group.

<v1 | v2c | usm> specifies the security model.

<security-name> specifies the security name.

e.g. no snmp group usm testuser

show snmp group

Show group list.

snmp view <view-name> <included | excluded> <view-subtree> <view-mask>

Add a view.

<view-name> specifies the view name.

<included | excluded> specifies the view type.

<view-subtree> specifies the view subtree (e.g. .1.3.6.1.2.1).

<view-mask> specifies the view mask, in hexadecimal digits.

e.g. snmp view testview included 1.3.6.1.2.1 0xff

no snmp view <view-name>

Delete a view.

<view-name> specifies the view name.

e.g. no snmp view system

show snmp view

Show view list.

**snmp access <group-name> <v1 | v2c | usm> <noauth | auth | authpriv> <read-name>
<write-name> <notify-name>**

Add an access control.

<group-name> specifies the group name.

<v1 | v2c | usm> specifies the security model.

<noauth | auth | authpriv> specifies the security level.

<read-name> specifies the access read view name.

<write-name> specifies the access write view name.

<notify-name> specifies the access notify view name.

e.g. snmp access test usm testauth all all all

no snmp access <group-name> <v1 | v2c | usm> <noauth | auth | authpriv>

Delete an access control.

<group-name> specifies the group name.

<v1 | v2c | usm> specifies the security model.

<noauth | auth | authpriv> specifies the security level.

e.g. no snmp access test usm auth

show snmp access

Show access list.

snmp engine-id <enterprise-id> <engine-id>

Setup SNMPv3 engine ID.

<engine-id> specifies the engine ID, in the format of text string.

e.g. snmp engine-id 123456789123456789123456

show snmp engine-id

Show SNMPv3 engine ID.

snmp usm-user <user-name> [<md5 | none>]

Add SNMPv3 USM user.

<user-name> specifies the user name.

<md5 | none> specifies the authentication type.

e.g. Create a user name is testuser and password is 12345678, use auth md5 then enter CLI command:

snmp usm-user testuser md5 <cr>

New password for authentication (8<=length<=32):

12345678<cr>

Retype new password:

12345678<cr>

no snmp usm-user <user-name>

Delete SNMPv3 USM user.

<user-name> specifies the user name.

e.g. no snmp usm-user testuser

show snmp usm-user

Show all SNMPv3 USM users.

4.4.16 IGMP

[no] igmp

Enable/disable IGMP snooping.

[no] igmp fastleave

Enable/disable IGMP snooping fast leave. If enable, switch will fast delete member who send leave report, else wait one second.

[no] igmp querier

Enable/disable IGMP snooping querier.

[no] igmp CrossVLAN

Enable/disable IGMP snooping CrossVLAN

show igmp <status | router | groups | table>

Show IGMP snooping information.

status specifies IGMP snooping status and statistics information.

router specifies IGMP snooping router's IP address.

groups specifies IGMP snooping multicast group list.

table specifies IGMP snooping IP multicast table entries.

igmp clear_statistics

Clear IGMP snooping statistics counters.

4.4.17 802.1x

This switch supports IEEE 802.1x standard which provides port-based access control by validating end user's authorization through authentication (RADIUS) server. EAP- MD5/TLS/PEAP authentication types are supported for this switch.

[no] dot1x

Enable or disable 802.1x.

radius-server host <ip-addr> <1024..65535> <1024..65535>

Set radius server IP, port number, and accounting port number.

<ip-addr> specifies server's IP address.

1st <1024..65535> specifies the server port number.

2nd <1024..65535> specifies the accounting port number.

radius-server key <key-str>

Set 802.1x shared key.

<key-str> specifies shared key string.

radius-server nas <id-str>

Set 802.1x NAS identifier.

<id-str> specifies NAS identifier string.

show radius-server

Show radius server information, including radius server IP, port number, accounting port number, shared key, NAS identifier

dot1x timeout quiet-period <0..65535>

Set 802.1x quiet period. (default: 60 seconds).

<0..65535> specifies the quiet period, in seconds.

dot1x timeout tx-period <0..65535>

Set 802.1x Tx period. (default: 15 seconds).

<0..65535> specifies the Tx period, in seconds.

dot1x timeout supplicant <1..300>

Set 802.1x supplicant timeout (default: 30 seconds)
<1..300> specifies the supplicant timeout, in seconds.

dot1x timeout radius-server <1..300>

Set radius server timeout (default: 30 seconds).
<1..300> specifies the radius server timeout, in seconds.

dot1x max-req <1..10>

Set 802.1x maximum request retries (default: 2 times).
<1..10> specifies the maximum request retries.

dot1x timeout re-authperiod <30..65535>

Set 802.1x re-auth period (default: 3600 seconds).
<30..65535> specifies the re-auth period, in seconds.

show dot1x

Show 802.1x information, quiet period, Tx period, supplicant timeout, server timeout, maximum requests, and re-auth period.

dot1x port <fu | fa | au | no> <port-list>

Set 802.1x per port information.
fu specifies forced unauthorized.
fa specifies forced authorized.
au specifies authorization.

no specifies disable authorization.

<port-list> specifies the ports to be set.

show dot1x port

Show 802.1x per port information.

4.4.18 DHCP Relay & Option 82

[no] dhcp-option82

Enable/disable DHCP option82 function.

[no] dhcp-relay

Enable/disable DHCP relay function.

dhcp-option82 <enable | disable> <LIST>

Enable/disable port-based option82 function.

dhcp-relay <enable | disable> <LIST> <IP address>

Enable/disable port-based DHCP relay function.

dhcp router <LIST>

Set DHCP router port

show dhcp configuration

Show DHCP configuration information

4.4.19 Syslog

syslog-server <server-ip> <logging-level>

Setting the syslog server and logging level.

<server-ip> specifies the syslog server IP

<logging-level> specifies the logging level (0: none; 1: major; 2: all)

show syslog-server

Display the syslog server IP and logging level

4.4.20 SSH

ssh <v1 | v2 | all>

Enable ssh function.

<v1 | v2 | all> specifies which ssh version to support.

no ssh

Disable ssh function.

4.4.21 Reboot switch

- **Reset to Default**

erase startup-config

Reset configurations to default factory settings at next boot time.

- **Restart**

boot

Reboot (warm-start) the switch.

4.4.22 TFTP Function

- **TFTP Firmware Update**

copy tftp firmware <ip-addr> <remote-file>

Download firmware from TFTP server.

<ip-addr> specifies the IP address of the TFTP server.

<remote-file> specifies the file to be downloaded from the TFTP server.

- **Restore Configure File**

copy tftp <running-config | flash> <ip-addr> <remote-file>

Retrieve configuration from the TFTP server. If the remote file is the text file of CLI commands, use the keyword running-config. If the remote file is the configuration flash image of the switch instead, use the keyword flash.

<ip-addr> specifies the IP address of the TFTP server.

<remote-file> specifies the file to be downloaded from the TFTP server.

- **Backup Configure File**

copy <running-config | flash> tftp <ip-addr> <remote-file>

Send configuration to the TFTP server. If you want to save the configuration in a text file of CLI commands, use the keyword running-config. If you want to save the configuration flash image instead, use the keyword flash.

<ip-addr> specifies the IP address of the TFTP server.

<remote-file> specifies the file to be backed up to the TFTP server.

4.4.23 Access Control List

Packets can be forwarded or dropped by ACL rules include IPv4 or non-IPv4 packets. This switch can be used to block packets by maintaining a table of packet fragments indexed by source and destination IP address, protocol, and so on.

NOTE: This function is available only in the 802.1q VLAN enabled environment.

- **IPv4 ACL commands**

no acl <group id>

Delete ACL group.

<group id> specifies the group id (1~220).

e.g. no acl 1

no acl count <group id>

Reset the ACL group count

<group id> specifies the group id (1~220).

Enable/Disable acl <group id>

Reset the ACL group count

<group id> specifies the group id (1~220)

Enable/Disable acl <group id>

Reset the ACL group count

<group id> specifies the group id (1~220)

show acl [<group id>]

Show all or ACL group information by group id
<group id> specifies the group id, null means all valid groups.
e.g. show acl 1
Group Id : 1

Action : Permit
Rules:
Vlan ID : Any
IP Fragement : Uncheck
Src IP Address : Any
Dst IP Address : Any
L4 Protocol : Any
Port ID : Any
Hit Octet Count : 165074
Hit Packet count : 472

**acl (add|edit) <group id> (permit|deny) <0-4094> ipv4 <0-255> A.B.C.D A.B.C.D A.B.C.D
A.B.C.D (check|unCheck) <0- 65535> <0-26>**

Add or edit ACL group for IPv4 packets.
(add|edit) specifies the operation.
<group id> specifies the group id (1~220).
(permit|deny) specifies the action. permit: permit packet cross switch; deny: drop packet.
<0-4094> specifies the VLAN id. 0 means don't care.
<0-255> specifies the IP protocol. 0 means don't care.
1st A.B.C.D specifies the Source IP address. 0.0.0.0 means don't care.
2nd A.B.C.D specifies the Mask. 0.0.0.0 means don't care, 255.255.255.255 means compare all.
3rd A.B.C.D specifies the Destination IP Address. 0.0.0.0 means don't care.
4th A.B.C.D specifies the Mask. 0.0.0.0 means don't care, 255.255.255.255 means compare all.
(check|unCheck) specifies the IP Fragment. check: Check IP fragment field; unCheck: Not check IP fragment field.
<0-65535> specifies the Destination port number if TCP or UDP. 0 means don't care.
<0-26> specifies the Port id. 0 means don't care.
e.g. acl add 1 deny 1 ipv4 0 192.168.1.1 255.255.255.255 0.0.0.0 0.0.0.0 unCheck 0 0
This ACL rule will drop all packet from IP is 192.168.1.1 with VLAN id=1 and IPv4.

**acl (add|edit) <group id> (qosvoip) <0-4094> <0-7> <0-1F> <0-1F> <0-FF> <0-FF> <0-FFFF>
<0-FFFF> <0-FFFF> <0-FFFF>**

Add or edit ACL group for Ipv4.

(add|edit) specifies the operation.

<group id> specifies the group id (1~220).

(qosvoip) specifies the action, do qos voip packet adjustment.

<0-4094> specifies the VLAN id. 0 means don't care.

<0-1F> specifies the port ID value.

<0-1F> specifies the port ID mask.

<0-FF> specifies the protocol value.

<0-FF> specifies the protocol mask.

<0-FFFF> specifies the source port value.

<0-FFFF> specifies the source port mask.

<0-FFFF> specifies the destination port value.

<0-FFFF> specifies the destination mask.

e.g. acl add 1 qosvoip 1 7 1 1 0 0 0 0 0

● Non-IPv4 ACL commands

no acl <group id> and **show acl [<group id>]** commands are the same as in Ipv4 ACL commands.

acl (add|edit) <1-220> (permit|deny) <0-4094> nonipv4 <0-65535>

Add or edit ACL group for non-Ipv4.

(add|edit) specifies the operation.

<group id> specifies the group id (1~220).

(permit|deny) specifies the action. permit: permit packet cross switch; deny: drop packet.

<0-4094> specifies the VLAN id. 0 means don't care.

<0-65535> specifies the Ether Type. 0 means don't care.

e.g. acl add 1 deny 0 nonipv4 2054

This ACL rule will drop all packets for ether type is 0x0806 and non-IPv4

4.4.24 SIP/SMAC Binding

Source IP (SIP) / Source MAC (SMAC) address binding is another type of ACL rule to provide secured access to the switch. Only the traffic which matches all criteria of specified source IP address, source MAC address, VLAN ID and port number can be allowed to access to the switch. This function is also called IP-MAC lock.

bind

Enable binding function.

no bind

Disable binding function.

no bind <group id>

Delete Binding group.

<group id> specifies the group id (1~220).

e.g. no bind 1

show bind [<group id >]

Show Binding group information.

<group id> specifies the group id (1~220), null means all valid groups.

e.g. show bind 1

bind add < group id > A:B:C:D:E:F <0-4094> A.B.C.D <1-26>

Add Binding group.

< group id > specifies the group id (1~220).

1st A.B.C.D specifies the MAC address.

<0-4094> specifies the VLAN id. 0 means don't care.

2nd A.B.C.D specifies the Source IP address. 0.0.0.0 means don't care.

3rd A.B.C.D specifies the IP Address.

<1-26> specifies the Port id.

e.g. bind add 1 00:11:22:33:44:55 0 192.168.1.1 1. This Binding rule will permit all packet cross switch from device's IP is

192.168.1.1 and MAC is 00:11:22:33:44:55 and this device connect to switch port id=1.