

NEW



IPM-T1, IPM-4T1

T1/4T1 over Ethernet Web Management

IPM-T1/4T1 is designed as a multi-service access platform for PDH over IP applications. T1 frames can be mapped/de-mapped into/from IP packets. An adaptive clock recovery method for Ingress PDH (PSN->TDM) clock generation is implemented to support T1 (ITU-T G.824) Jitter performance.

IPM-T1/4T1 provides cost-effective applications of traditional circuit-switched system over IP. It is easy to interconnect existing phone systems over IP that are used to carry data, voice and video. With high precision clock recovery technology, IPM-T1/4T1 is capable of supporting 2G/3G/4G backhaul and provides smooth services. IPM-T1/4T1 can transparently transport proprietary signaling that are required to support PBX features, including call conference, call forwarding and SS7. Customer can easily apply and enjoy better integration of TDM and IP devices with lower network expense. With a pair of IPM-T1/4T1 and guaranteed internet bandwidth, it is sure to save cost dramatically, and to ensure the QoS of voice based on interconnections of TDM equipment.

Features


- Supports Web Management
- Supports IETF RFC4553 Structure-Agnostic TDM over Packet (SAToP), Metro Ethernet Forum MEF8
- Use Raw Encapsulation method for PDH payload over Ethernet packet
- Supports Circuit Emulation Service over Ethernet networks
- Comply with IETF draft standard for CESoPSN and SAToP; Metro Ethernet Forum MEF8 IA
- Supports both Point-to-Point and Point-to-Multipoint operation.
- Supports Adaptive Clock recovery block for Ingress PDH (PSN -> TDM) clock generation. Recovered clock jitter is compliant to ITU-T G.824 (T1 Jitter Control)
- Configurable jitter buffer depth to compensate PDV (Packet Delay Variation) with the flexible setting of 11ms, 23ms, 40ms, 75ms
- Lost packets processing / compensation via PW (Pseudo Wire) control field Sequence Number
- Provide Subscriber side Data traffic bandwidth control to guarantee enough TDM payload bandwidth
- PDH LOS detection triggered PW L field or payload AIS generation at Egress direction (TDM->PSN)
- Configurable IEEE 802.3 DA/SA assignment
- LED alarm display for T1 Power failure status
- T1 NRZ Serial Interface with LOS/AIS detection

Specifications

T1 Interface	Standards	TU-T G.703, G.704, ANSI T1.403
	Ports	1 or 4-Port
	Data Rate	1.544Mbps ±32ppm
	Connector	RJ-48c for 100 ohm
	Line Coding	B8ZS
Ethernet Interface	WAN Port	100 Base-TX Ethernet
	Interface	RJ-45
	LAN port	100 Bases-TX Ethernet
	Interface	RJ-45

Dimensions	125 x 320 x 44 mm (D x W x H)
Power	AC: 85 ~ 264V @ 47 ~ 63Hz
	DC: -72V ~ -36V
Environment	Ambient temperature: 0° ~ 50°
	Storage temperature: 0° ~ 85°
	Humidity: 5 ~ 95% non-condensing
Management	Console or Telnet / Web / SNMP management (via Ethernet)

Application

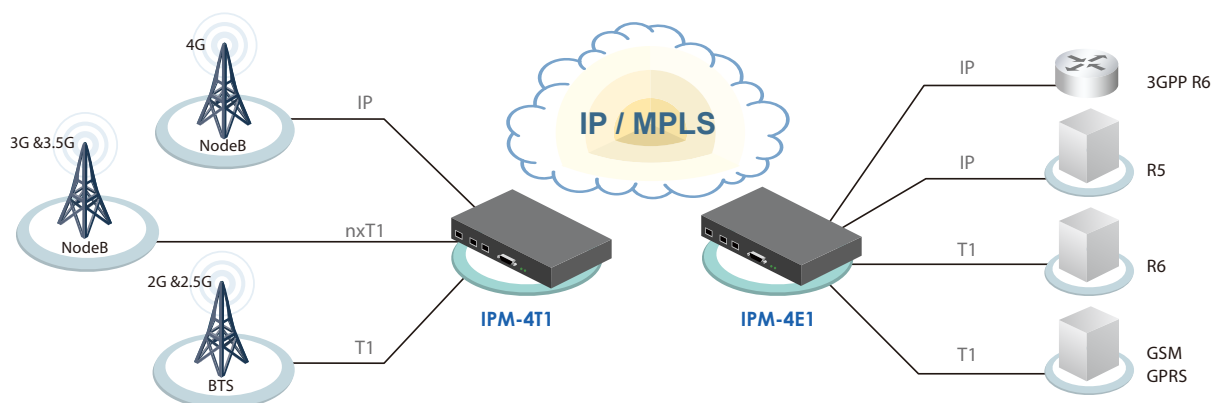

Ordering Information

Model Name	Description
IPM-T1-AD	T1 over Ethernet with built-in AC+DC Power
IPM-4T1-AD	4T1 over Ethernet with built-in AC+DC Power

Port Number Power Type
IPM - □□□□ - □□□
 Example: **IPM - 4T1 - AD**